(51) International Patent Classification 7 : **B60C 23/04**	**A1**	(11) International Publication Number: **WO 00/47429** (43) International Publication Date: 17 August 2000 (17.08.00)

(71) Applicant *(for all designated States except US)*: EMTOP
   LIMITED [GB/GB]; 85 Ballards Lane, London N3 1XU
   (GB).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: BANKART, Adrian,
   Edmund [GB/GB]; 121 Tottenham Road, London N1
   4EA (GB). BRADSHAW, Sarah, Catherine [GB/GB]; 2a
   Clapham Road, London SW9 0JG (GB).

(74) Agent: HITCHING, Peter, Matthew; Haseltine Lake & Co.,
   Imperial House, 15–19 Kingsway, London WC2B 6UD
   (GB).

(54) Title: SIGNAL TRANSMISSION IN A TIRE PRESSURE SENSING SYSTEM
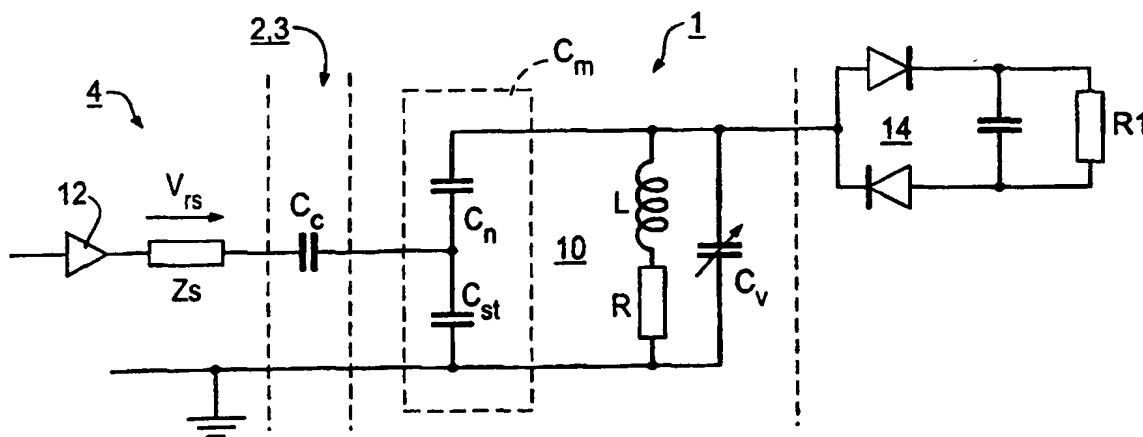
(57) Abstract

     Apparatus for use, for example, in a passive sensor system such as an in–vehicle tyre pressure sensing system, comprises transmitter circuitry (1) and receiver circuitry (4) coupled together by a coupling (C_c), preferably a wireless coupling such as two opposed plate–form antennae. The transmitter circuitry (1) includes a resonator (10) having at least one component (C_v) whose value influences a natural resonant frequency of the resonator means and can be changed in use of the circuitry. The effective value is changed, for example, by a physical parameter being sensed or by a control signal to be transmitted. The receiver circuitry (4) includes a driver section (12) for applying to the resonator (10) an excitation signal having a predetermined excitation frequency that is different from the natural resonant frequency. The transmitter circuitry (1) preferably derives its power supply from the excitation signal via a rectifier circuit (14). The receiver circuitry detects such a change in the effective value via the coupling.

GIGNAL TRANSMISSION IN A TIRE PRESSURE SENSING SYSTEM.

The present invention relates to signal transmission, and in particular but not exclusively to
5   wireless signal transmission. Such wireless signal transmission is required, for example, in sensor systems for use with two elements that are movable relative to one another, a sensor on one of the two elements transmitting its sensor data to, and
10   preferably being supplied with power from, a receiver on the other element. For example, one embodiment of the present invention is intended for use in a pressure sensor system on a vehicle to measure tyre pressure.

The key problem of in-vehicle tyre pressure
15   measurement stems from the fact that the wheels and tyres rotate relative to the vehicle. Sensed information has to be passed from the moving wheel. Wheels and tyres must still be interchangeable by users and garages and any failures must have safe
20   consequences. Furthermore, tyre pressures must be sensed accurately and reliably, and the sensed information must be converted into a suitable form of signal which is transmitted via a suitable link provided at each wheel. The information must be
25   conveyed to the dashboard and converted into a form suitable for display. An overall accuracy of about ±2% should desirably be maintained. In addition, the complete system must be implemented within certain constraints of size and weight to operate in the
30   electronically and environmentally inhospitable environment of the vehicle. To be applicable to mass-market vehicles the system must also be cheap.

Tyre pressures vary significantly with ambient conditions. This means that a measurement of absolute
35   pressure alone is insufficiently accurate to verify that the tyre is correctly inflated. Even a measure of

-2-

pressure relative to atmospheric pressure is
insufficient if the air in the tyre is hot from use.
It is therefore also desirable to measure the air
temperature in the tyre and to make allowances for this
5   to establish that the tyre inflation is correct.

In one commercially available tyre pressure
measurement system, a battery, sensors and a radio
transmitter are provided within each tyre on the
vehicle, and the vehicle carries a central radio
10   receiving station to interpret and display the data.
The transmitters in the wheels are activated by vehicle
motion, and each has a coded signature so that it can
be identified and transmits its data to the central
receiving station where it is interpreted for display.
15   The system can relay both pressure and temperature
information. This system, however, has a large number
of drawbacks. It is complex and expensive; it requires
maintenance of the batteries in the wheels; it uses
radio for transmission which is pervasive and has
20   electro-magnetic coupling (EMC) pollution problems at
high vehicle density; the system must be reconfigured
and recoded if the wheel is moved to a different
position; and it does not operate until the wheel is
turning and therefore does not operate on spare wheels
25   or stationary vehicles.

Another existing measurement system uses
concentric close-coupled transformers on the vehicle
axles, and transmits power to the sensors and circuitry
in the wheels and multiplexes (times slices) this with
30   information transmitted from the wheels. Each
transformer is connected by cable to a central module
which controls the system and decodes the information
for display. The system is designed primarily for
heavy commercial vehicles and will relay both pressure
35   and temperature data.

This system is also undesirably complex and

requires that the coupling transformers are
incorporated at the vehicle design stage as they must
be concentric with the axles; it is complex
electronically because of the time slicing; additional
5   connections must be made to a wheel when it is fitted
and, while it is acceptable on heavy commercial
vehicles, it is problematic on cars.

Another system employs a simple go/no-go sensor in
each wheel which changes its characteristic resonant
10   frequency to indicate the change of state. Each sensor
is activated by an electromagnetic pulse and its echo
is monitored. This system, although simple, offers
limited performance. The go/no-go threshold is
intrinsic to the sensor and therefore the sensor has to
15   be changed if a different threshold is required, for
example if a wheel is to be moved from one axle to
another or if a high load is to be carried. The system
cannot detect over-pressure, nor is it readily
adaptable to multi-wheel axles.

20   A number of other systems exist which also
incorporate tyre re-inflation mechanisms. These are
inevitably costly and complicated. Some systems are
available which measure other parameters, such as axial
height or rolling tyre circumference, to give an
25   indication of the tyre inflation. These other
parameters do not easily relate to the tyre
manufacturer's specifications.

According to a first aspect of the present
invention there is provided signal transmission
30   apparatus comprising: transmitter circuitry including
resonator means having at least one component whose
effective value influences a natural resonant frequency
of the resonator means and can be changed in use of the
circuitry; excitation means for applying to the
35   resonator means an excitation signal having a
predetermined excitation frequency that is different

from the said natural resonant frequency; and
coupling means for providing a coupling between the
said resonator means and receiver circuitry of the
apparatus, the receiver circuitry being operable to
detect such a change in the said effective value via
the said coupling.

According to a second aspect of the present
invention there is provided a pressure sensor
including: first and second mutually-opposed electrodes
having a dielectric therebetween, at least one of the
two electrodes being adapted to deflect towards the
other electrode when the sensor is subject to an
applied pressure such that the capacitance between the
electrodes changes with the applied pressure.

According to a third aspect of the present
invention there is provided sensing apparatus, for
transmitting sensor data from a first element to a
second element, the first and second elements being
movable relative to one another, which apparatus
includes signal transmission apparatus embodying the
aforesaid first aspect of the present invention; the
said transmitting circuitry being adapted to be carried
by the first element and comprising sensor means for
sensing one or more predetermined parameters, the said
change in the said effective value being brought about
by a change in at least one of the said predetermined
parameters; and the said receiving circuitry being
adapted to be carried by the second element.

According to a fourth aspect of the present
invention there is provided tyre pressure measuring
apparatus, adapted to be carried by a vehicle,
including signal transmission apparatus, embodying the
aforesaid first aspect of the present invention,
wherein the said transmitter circuitry comprises sensor
means for sensing one or more predetermined parameters,
and the said change in the said effective value is

brought about by a change in at least one of the said predetermined parameters.

According to a fifth aspect of the present invention there is provided a signal transmission method for use with transmitter circuitry that includes resonator means having at least one component whose effective value influences a natural resonant frequency of the resonator means, and with receiver circuitry that has a coupling when in use to the said resonator means, the method comprising: applying to the resonator means an excitation signal having a predetermined excitation frequency that is different from the said natural resonant frequency; bringing about a change in the said effective value of the said one component in the transmitter circuitry; and detecting such a change in the said effective value in the receiver circuitry via the said coupling.

Reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 shows a block diagram of tyre pressure measurement apparatus embodying the present invention;

Figure 2 shows a graph for use in explaining operation of the Figure 1 apparatus;

Figures 3 and 4 show further graphs illustrating, to a larger scale than the Figure 2 graph, operation in a frequency range of interest in Figure 2;

Figure 5 shows a schematic circuit diagram for use in explaining parasitic capacitance effects in the Figure 1 apparatus;

Figure 6 shows a schematic cross-sectional view of a vehicle wheel, for explaining a physical arrangement of parts of the Figure 1 apparatus in one embodiment of the invention;

Figure 7 shows a block circuit diagram of a sensor module included in the Figure 1 apparatus;

Figure 8 is a detailed circuit diagram

corresponding to Figure 7;

Figure 9 shows a schematic cross-sectional view of the sensor module in one embodiment of the invention;

Figure 10 shows a block circuit diagram of a relay module included in the Figure 1 apparatus;

Figures 11(A) to 11(C) are detailed circuit diagrams corresponding to Figure 10;

Figures 12(A) to 12(H) present waveforms produced in the Figure 1 apparatus in operation thereof;

Figure 13 shows a block circuit diagram of a display module included in the Figure 1 apparatus;

Figure 14 shows an example of a signal converter circuit included in the Figure 13 display module;

Figure 15 shows an optional additional part of the signal converter circuit of Figure 14;

Figure 16 shows a schematic cross-sectional view of a multi-wheel axle vehicle arrangement, for use in explaining a physical arrangement of parts of the Figure 1 apparatus in another embodiment of the present invention;

Figure 17 shows a block circuit diagram of a modified sensor module for use in the Figure 1 apparatus;

Figure 18 shows a schematic circuit diagram of signal transmission apparatus according to another aspect of the present invention; and

Figure 19 shows a schematic cross-sectional view of parts of a rigid inflatable boat, for use in explaining application of pressure measurement apparatus embodying the present invention to such a boat.

As shown in the block diagram of Figure 1, tyre pressure measurement apparatus embodying the present invention comprises five principal elements: a sensor module 1, a wheel antenna 2, a fixed antenna 3, a relay module 4 and a display module 5. The sensor module 1,

wheel antenna 2, fixed antenna 3 and relay module 4 are provided on a per-wheel basis; the display module 5 is provided in common for all wheels. The sensor module 1 and wheel antenna 2 are mounted on the relevant wheel and the fixed antenna 3, relay module 4 and display module 5 are carried by the vehicle.

The sensor module 1 is mounted on a particular wheel. Preferably, the module is arranged in the well of the wheel rim, but alternatively the module can be arranged externally of the tyre with pressure and thermal connections to the air contained in the tyre. The sensor module contains sensors that respond to pressure and temperature, as well as circuitry for producing one or more signals whose frequency is a function of pressure and temperature. The sensor module also includes load circuitry, in the form of a resonator, whose impedance varies according to the signals produced, and means for deriving a power supply from the load.

The relay module 4, which is coupled reactively to the sensor module by the antennae 2 and 3, serves to drive the load circuitry in sensor module and to detect the variation in loading and convert this variation into a signal suitable for use by the display module 5. The relay module can be mounted either on the axle, close to or as part of the fixed antenna 3, or in the dashboard.

The relay module 4 contains driver circuitry to provide a high-frequency voltage and current to the fixed antenna 3 via a source impedance, and circuitry to detect the variation in loading of the relay module and to supply a signal representing the variation to the display module 5.

The display module 5 processes the signals from the relay module for each wheel, applies any required signal corrections and displays the information to the

driver. The display module is preferably mounted on, or behind the dash, in close proximity to or integrated with the actual display. The display module may, for example, be implemented as a single-chip microcontroller, or as part of an existing microcontroller that also performs other driver-information functions.

The Figure 1 apparatus will now be described in more detail.

As mentioned in the introduction, for accurate tyre pressure measurement, a simple pressure measure is not adequate. Even in temperate zones the ambient temperature may vary by 30°C and tyre heating, due to use, may increase the tyre temperature by a similar amount. The effect on absolute tyre pressure can be a 20% change and gauge tyre pressure may vary by 30% or more. This means that, to obtain desirably high accuracy, it is necessary to measure both pressure and temperature for the or each tyre.

If the values of atmospheric pressure and temperature are known, the value of the gauge pressure at the atmospheric temperature can be calculated using the standard gas laws:

$$P_g = \frac{P}{T} \cdot T_a - P_a \qquad (1)$$

where P_g is the required gauge pressure, P is the measured absolute pressure, T is the measured absolute temperature, and P_a and T_a are the atmospheric pressure and temperature respectively.

It would be possible to measure the absolute pressure P and the absolute temperature T separately and transmit two signals representing the measured values respectively to the vehicle. However, a preferred feature of tyre pressure measurement apparatus embodying the present invention is to combine

the pressure and temperature measurements into a single
parameter, namely the quotient ρ, where

$$\rho = \frac{P}{T} \qquad (2)$$

In order to simplify the required circuitry in the
sensor module, it is desirable to design and connect
the pressure and temperature sensing elements such that
a signal is produced having a property that is a
function of the quotient ρ.

The basic time period t of an RC oscillator is
given by:

$$t = k_o \cdot R \cdot C \qquad (3)$$

where k_o is a constant, R is the resistive element
and C is the capacitive element.

Similarly, the basic time period t of an LC
oscillator is given by:

$$t = k_o \cdot \sqrt{L \cdot C} \qquad (4)$$

where L is the inductive element and C is the
capacitive element.

From this it can be seen that, if pressure affects
one frequency-controlling element (e.g. C) and
temperature the other (R), the two measurements can be
combined inherently if the characteristics of the
respective sensing elements are of an appropriate form.

For example, if the capacitance of the pressure
sensing element is an almost linear function of the
absolute pressure, a trimming capacitor allows for
calibration of the capacitance-pressure characteristic
to match a power function. Thus, the overall
capacitance (pressure sensing element in combination
with trimming capacitor) is given by:

$$C_p = k_p \cdot P^{\phi} \qquad (5)$$

where C_p is the overall capacitance, k_p and φ are

constants and P is the absolute pressure.

In this case, the temperature sensing element should have a resistance temperature characteristic that is an inverse power function to the power function of the capacitance-pressure characteristic of the pressure sensing element, at least to a good approximation over the required temperature range. In other words,

$$R_t = k_t \cdot T^{-\phi} \tag{6}$$

where R_t is the resistance, k_t is a constant, ϕ is the same constant as in equation 5 and T is the absolute temperature.

Combining the pressure and temperature characteristics with the oscillator time-period function gives

$$t = k_o \cdot k_p \cdot k_t \cdot \left(\frac{P}{T}\right)^{\phi} \tag{7}$$

It follows from equation 7 that it is possible to recover the value of the quotient ρ from the frequency of the oscillator. In this way, temperature compensation of the measured pressure is achieved without resort to using two separate data channels to convey pressure and temperature data separately.

Incidentally, if the pressure sensing element characteristic is linear, the value of ϕ in equation 5 will generally be equal to 1. However, if the pressure sensing element has a characteristic that is not linear or that is such that the extrapolated value of its capacitance at a complete vacuum is not equal to 0 or negative, it will not be possible to trim the capacitance-pressure characteristic of equation 5 to a proportional power curve by adding a trimming capacitance. Nonetheless, as the regions of interest in both the capacitance-pressure and resistance-pressure characteristics are substantially away from the origin,

power curves with values of ϕ not equal to 1 can be
closely matched using suitable values of trimming
capacitor for the pressure sensing element and series
resistor for the temperature sensing element.

5   Preferred designs of pressure and temperature
sensing elements will be described in more detail later
in the present specification.

        Next, coupling between the sensor module 1 on the
or each wheel and its associated relay module 4 on the
10   vehicle will be explained. This coupling must serve to
transmit at least one signal from the sensor module 1 to
the relay module 4, from which signal the relay module
can derive the relevant measurement parameter(s) (e.g.
the quotient ρ) produced by the sensor module 1.

15   Furthermore, in a preferred embodiment, the
coupling also serves to transmit power from the vehicle
to the sensor module 1.

        As the vehicle wheels rotate relative to the
vehicle axles when the vehicle is in use it is
20   preferable that the coupling between the sensor and
relay modules is by non-contact means so that wear is
eliminated. Two non-contact coupling methods can be
used to transmit power in one direction and receive a
signal in the other direction: capacitive coupling and
25   magnetic coupling. Radio, which is used in some
conventional tyre pressure measurement systems, can only
effectively be used to transmit signals and requires a
local power source (battery) in the wheel. Furthermore,
radio is by its nature a pervasive medium and presents
30   additional problems.

        Capacitive coupling is the preferred coupling
method for use in the present invention. This can be
achieved simply by the use of conducting plate antennae
separated by an air gap. The electric potential on one
35   plate produces a localised electric field that induces a
potential on the other. The plates themselves can be

protected by being covered by an insulating material.
The plates do not have to be planar or of the same size.

Antennae in the form of simple conducting plates
are far less prone to electromagnetic interference than
5   coils.

It is also possible to use magnetic induction
between two closely-spaced concentric coils, one mounted
on the axle and the other on the wheel. With this
method, the sensor module 1 on the wheel and the relay
10   module 4 on the axle are coupled when the magnetic field
from one coil links with the other coil. In practice,
magnetic coupling may be difficult to arrange because of
the positions at which brake components are normally
arranged on the wheels. Large diameter coils could be
15   used to avoid the brake components but these are
particularly susceptible to electromagnetic
interference.

Both with capacitive and magnetic coupling, only AC
currents can be transmitted through the coupling.
20   Transmission of power through the coupling is
achieved by the relay module (source) applying an
alternating voltage to the coupling, and by the sensor
module (load) taking a current from the coupling.

Transmission of information from the load back to
25   the source is carried out by varying the load. If the
current taken by the load must come from the source, it
follows that measurement of this current at the source
will show any variation in the load. This is the
principle on which most passive sensors operate, i.e.
30   the sensor impedance changes according to the parameter
being measured and the electrical load presented by the
sensor is measured.

In order to ensure that the only supply of current
to the load is from the source, it is preferable to make
35   the load frequency selective. In this way, noise
outside the chosen frequency band is rejected and does

not produce significant current in the load which might adversely affect the signal.

Because the impedance of the coupling between the source and the load is not negligible and may vary, in many (but not all) situations it is not satisfactory to measure the load directly to get accurate information.

To overcome this problem, a preferred feature of the present invention is to encode the sensor information as a frequency and to modulate the load by this frequency. It is the frequency of variation of the load that is then decoded to recover the desired sensor information. In this way, drift in the value of the coupling impedance does not affect the information being transmitted.

The relay module (source) can be regarded as having a complex impedance Z_s, the coupling a complex impedance Z_c, and the sensor module (load) a complex impedance Z_L. For maximum power transmission the impedance as seen by the load should match the load impedance. Similarly, for best reception of the load variation, the impedance as seen by the source should match the source impedance. Thus, for best performance, Z_L should match $Z_c + Z_s$, and at the same time Z_s should match $Z_c + Z_L$.

This cannot be achieved if both Z_c and Z_L are purely resistive and not even well approximated unless Z_c is very small. If, on the other hand, Z_L or Z_s, or both, are complex, and Z_c has no real component (as will be the case in capacitive coupling and can be arranged using inductive coupling), the desired matching can be achieved.

In the case of complex impedances, matching means that the real (resistive) components should be the same and the imaginary (reactive) components should be complimentary, i.e. the same in magnitude and opposite in sign (the complex conjugate).

In order to make the load frequency selective, it

may be considered to use coupled tuned circuits which are highly selective. Effectively, this enables the impedances of the source and load to swamp the coupling impedance and thereby approach the matching criteria.

The load is then varied in either magnitude or phase or both to produce the signal. However, if tuning is to be maintained, load variation must either be only in the resistive part of the load (magnitude variation), or, if it is in the reactive part (phase variation) it must be kept to a very low level. These requirements are problematic in practice. Firstly, a large variation in magnitude has a correspondingly large effect on the power transmitted. Furthermore, if signals are small, high levels of amplification must be used. This in turn increases the demand for selectivity because otherwise noise will be amplified with the required signals.

In order to solve these problems associated with tuned circuits, while at the same time achieving a satisfactory degree of frequency selectivity, a preferred embodiment of the present invention employs a "detuned resonator" to provide the load impedance Z_L i.e. a resonator whose natural resonant frequency is "detuned" from the frequency of an excitation signal applied to the resonator. In this way, tight tolerances for tuning are not required. Also, relatively large signals can be used without disturbing power transmission, so that very high levels of amplification are not required and selectivity demands are reduced. Additionally, sensitivity to tuning drift is drastically reduced.

A detuned resonator used to provide the load Z_L comprises an inductor, and associated series resistance, in parallel with a capacitor. Active elements equivalent to such inductors, resistances and capacitors can be used, but these will require power. In this way, impedance matching can be achieved even when the

coupling impedance is comparable with the source and load impedances.

If the coupling impedance is capacitive, an excitation frequency lower than the resonant frequency of the resonator is used. On the other hand, if the coupling impedance is inductive, an excitation frequency higher than the resonant frequency of the resonator is used.

The load can be readily varied by altering either of the reactive components that make up the resonator, and, less preferably, by altering the resistive component. Because of the characteristic curve of impedance against frequency of the resonator, a large change in impedance can be produced with a small change in value of one of the reactive components.

Using a detuned resonator with a relatively low Q (for example in the range from 10 to 30), wide component tolerance is acceptable and the need to tune circuits individually can be avoided.

Additionally, because a resonator is still frequency-selective it will reject excitation and noise at frequencies outside its bandwidth. Although this bandwidth is wider than that of a highly tuned circuit, signal amplification does not need to be as high.

This selectivity means that more than one sensor module can be driven by one relay module using the same antennae for coupling if the sensor modules have different resonant frequencies and the relay module switches between different excitation frequencies.

Figure 2 is a graph for use in illustrating the characteristics of a capacitively coupled detuned resonator. In Figure 2, the bold curve represents the variation in voltage V_{rs} across a resistive source impedance with excitation frequency ω. This source voltage V_{rs} is a measure of current flowing to the load. The feint curve shows the variation in voltage V_L across

the load with excitation frequency. The dashed curve
shows the variation in phase with excitation frequency.
All three curves have been normalised for a resonant
frequency of 1. Since a change in one of the reactive

5   components in the resonator changes its resonant
frequency, this can be considered as an equivalent shift
in excitation frequency ω.

The region of interest in Figure 2 includes the
frequency range between the maximum and the minimum of

10 V_{rs} where V_L is high enough to power the load. In
addition, the region of interest extends slightly beyond
this max-min frequency range up to an upper reverse
frequency and down to a lower reverse frequency. At
each of these reverse frequencies the effect on the load

15 current of a change in the resonator reactance is
reversed. This region is, for example, at least from a
value lower than 0.85 times the resonant frequency
(possibly as low as 0.8 times) to a value higher than
0.97 times the resonant frequency. Outside this region

20 there is insufficient power transmission to the load so
other frequencies will be rejected. In this region the
slope of V_{rs} is steep so that a variation in ω (i.e. a
variation in one of the reactive components) will
produce a large corresponding change in V_{rs}.

25 The usable bandwidth, defined as the region between
the maximum and minimum of the V_{rs} versus ω curve in
Figure 2, depends primarily on the ratio of the load
resonator capacitance to the coupling capacitance. A
high ratio gives a narrow band; a low ratio gives a wide

30 band. In particular, the equation defining the curve
concerned is:

$$V_{rs} = \left| \frac{V \cdot R_s}{R_s + \left(\dfrac{1}{i \cdot \omega \cdot C_c} + \dfrac{1}{\dfrac{1}{R_L} + \dfrac{1}{R + i \cdot \omega \cdot L} + i \cdot \omega \cdot C} \right)} \right| \qquad (8)$$

where V is the excitation voltage, R_s is the source
impedance, ω is the excitation frequency, C_c is the
coupling capacitance, R_L is the equivalent load
5   resistance, R is the resonator damping resistance, L is
the resonator inductance and the C is the resonator
capacitance.

Figure 3 shows the region of interest expanded with
two plots of the source voltage V_{rs} for two different
10   values of resonator capacitance which differ by 1%.
This shows the variation in V_{rs} that can be expected at
a 1% change in load capacitance at a given excitation
frequency within the region of interest. Again, the
source voltage V_{rs} is a measure of current flowing to the
15   load.

Figure 4 shows the characteristics of the load
voltage V_L for the same 1% variation in load
capacitance. It can be seen that there is a large area
of overlap between the two curves. At a frequency of
20   approximately 0.95 of the resonant frequency the two
curves cross and there is no detectable change in the
load voltage for a change in the resonator capacitance.
This is useful in some critical applications, as
described later with reference to Figure 18.

An analysis of the circuit configuration shows, as might be expected, that the primary limitation to power transmission is the coupling impedance. The power P_L available at the load is given by

$$P_L = \left| \frac{1}{\left(1 + \left(R_s + \dfrac{1}{i \cdot \omega \cdot C_c}\right) \cdot \left(\dfrac{1}{R_L} + \dfrac{1}{R + i \cdot \omega \cdot L} + i \cdot \omega \cdot C\right)\right)^2} \right| \cdot \frac{V^2}{R_L} \qquad (9)$$

The size of the antennae 2 and 3 required when using capacitive coupling depends primarily on the power requirement of the sensor module. To allow for component tolerance, only a proportion of the maximum transmittable power can be relied upon. The amount of available power is given by the following conservative approximation.

$$P_L = \frac{V^2}{8} \cdot \Omega \cdot C_c \qquad (10)$$

where Ω is the resonant frequency.

The sensor module to be described later in the present specification requires less than 100 μW at 2.5 volts. If this power is provided by an excitation voltage of 1.75V (= 5V peak-to-peak) and a resonator frequency of 11MHz (giving an excitation frequency of approximately 10MHz) a minimum coupling capacitance of 4pF is required.

However, in practice, parasitic capacitance may be present on either or both sides of the coupling capacitor. This affects both power and signal transmission.

On the relay-module side the effect on power is not severe as this can be readily compensated for by

increasing the drive capability of the output buffer.
The received signal from the sensor module is attenuated
but increased amplification of the detected signal can
readily compensate.

5   Parasitic capacitance effects on the sensor-module
side are significant. For the sensor circuitry, power
is at a premium and parasitic capacitance affects the
frequency of the circuit. If this capacitance is
predictable and fixed it can be included in the main
10   capacitance element of the circuit. If not, the circuit
tuning will be adversely affected.

To overcome these problems and still maintain good
power supply to the sensor circuitry, the parasitic
capacitance can be included as part of a tapped
15   capacitor that forms part of the main capacitive element
of the resonator.

Figure 5 is a schematic representation of the
coupling between the relay module and the sensor module.
As shown in Figure 5 the sensor-module resonator 10 may
20   be considered to include a main capacitive element C_m, a
variable capacitive element C_v, an inductance L and a
resistive element R. As will be described later in more
detail, the variable capacitive element C_v has its
capacitance varied in dependence upon the measurement
25   parameter ρ.

The main capacitive element C_m is, as already
stated, a tapped capacitor made up of a first (or
network) capacitor C_n in series with a second (or
parasitic) capacitance C_{st}.

30   The coupling capacitance C_c can effectively be
regarded as linking an output source impedance Z_s
(including a blocking capacitor and inductance as well
as a source resistance) on the output-buffer side of the
relay module with the tap node between the network and
35   parasitic capacitances C_n and C_{st}. This limits the
effects of parasitic capacitance variation and at the
same time steps up the voltage on the resonator.

-20-

Exemplary values for the various circuit elements are shown in Table 1 below.

Table 1

5

ELEMENT	VALUE
C_c	15pF
C_n	56pF
C_{st}	100-200pF
C_v	10-11pF
L	4.7uH
R	33R
R1	50K
Z_s	330R

15

Although the inclusion of the network capacitance in the main capacitive element of the resonator helps to limit the effects of parasitic capacitance variation,
20 there are limits to how much parasitic capacitance can be accommodated. The parasitic capacitance C_{st} reduces the voltage applied to the sensor module in proportion to its capacitance relative to that of the coupling capacitance C_c (as in a standard capacitor divider
25 network). For a coupling capacitance C_c of 15pF and a parasitic capacitance of C_{st} of 135pF the voltage applied to the module will be reduced to one tenth.
The effect of variation in parasitic capacitance is also mitigated if the network capacitor C_n is small, but
30 in this case power available at the resonator is also small. As the network capacitor C_n is increased in capacitance, more power becomes available but parasitic capacitance variation has a greater effect on resonator tuning. The detuned resonator 10 with a Q of 10 to 15
35 has a wide frequency tolerance of 10 to 15%. In a LC

resonator this corresponds to a total tolerance in the
reactive components of 20 to 30%.

If tight tolerances are maintained in the specified
components a wide variation in parasitic capacitance can
be tolerated. A circuit with a Q of 10 using a 4.7μH
inductor with a 56pF network capacitor and 10pF of
variable capacitance C_V can operate over a range of
100pF to 200pF of parasitic capacitance and maintain
good signalling power if specified component tolerances
do not exceed 3%. Driven by a 9V drive, a power supply
to the sensor module of 150μW minimum and signal level
of 20μA minimum will be maintained.

The capacitance of parallel plates is given by

$$C = e_0 \cdot \frac{A}{d} \tag{11}$$

where C is the capacitance, A is the plate area, d
is the plate separation and e_0 (= 8.854 pF/m) is the
permittivity of air.

The minimum possible plate separation depends on
the clearance tolerances that can be maintained. If it
is assumed that a minimum 1mm clearance (including
insulation) must be maintained and that a tolerance of
±1mm can be maintained, the maximum plate separation
will be 3mm. For this spacing to meet a minimum
capacitance requirement of 10pF the plate area must be
at least 3388mm^2 if a bearing-coupled return (explained
later with reference to Figure 6) with effectively zero
impedance used. If a second plate is used for the
return path, two plates, each twice this size, must be
used.

Figure 6 is a schematic cross-sectional view
illustrating an example of the possible physical
arrangement of the sensor module 1, the wheel antenna 2,
the fixed antenna 3 and the relay module 4 in relation
to a vehicle wheel 20. The wheel 20 has a flange 22, an

outer rim 24, an inner rim 26 and a well 28 between the
inner and outer rims 24 and 26.

The sensor module 1 which is mushroom-shaped has an
externally-threaded base portion which projects through
5   a hole in the well 28 and is retained in place by a
retaining nut 30. A seal 32 is provided between the
base of the sensor-module head and the well 28 to
provide an airtight seal between the sensor module and
the wheel.

10   The sensor module 1 in Figure 6 preferably has a
metal casing which provides its earth connection
directly to the wheel well 28.

Incidentally, it will be appreciated that in the
Figure 6 arrangement the earth connection for the sensor
15   module 1 (return path) is implemented through the wheel
bearing. Although this is unreliable as an ohmic
connection alone, it will operate satisfactory as a
capacitive connection in parallel with an ohmic
connection at the frequencies proposed.

20   The wheel antenna 2 is shaped as the frustum of a
cone so as to fit under the inner rim 26 of the wheel.
The wheel antenna 2 is intended to snap into the recess
in the underside of the rim 26 formed by the bead
retaining hump used on modern wheels. The width of the
25   wheel antenna 2 may be, for example, 20mm. By making
the wheel antenna 2 conical, fitment of the wheel is
kept simple and the coupling to the fixed antenna will
be less susceptible to axial run out of the wheel rim
than if a plane antenna was used. In addition, the
30   antennae surfaces will be self-draining both when
stationary and rotating, and there is no interference
with wheel balancing weights.

The wheel antenna 2 is supported by polymer backing
material 34 between the inner rim 26 and the rear face
35   of the wheel antenna 2. An electrical connection (a
single wire) 36 extending between the base portion of
the sensor module 1 and the rear face of the wheel

antenna 2 connects the wheel antenna 2 to the circuitry inside the sensor module.

The fixed antenna 3 is supported by more polymer backing 38 on a mounting bracket 40. In this embodiment
5   a fixed antenna 170mm long is required to provide the necessary area. On a standard 13 inch wheel rim, this subtends an angle of about 60°. No modification to the axle will be required except for the provision of mounting points for the fixed antenna. These can
10   generally be common with the brake mountings. The relay module 4 is preferably arranged locally at the axle (i.e. is integral with the fixed antenna 3), as shown in Figure 6. Alternatively, the relay module may be remote from the fixed antenna 3, for example integral
15   with the display module, in which case connection to the fixed antenna will be through coaxial cable or by twisted pair.

Next, the components of the Figure 1 apparatus will be described in detail, starting with the sensor module
20   1.

Figure 7 shows a block diagram illustrating the principal elements of the sensor module 1 in a preferred embodiment of the present invention.

The sensor module 1 comprises a resonator 52
25   connected to the wheel antenna 2, a rectifier 54 connected to the resonator, a voltage control portion 56 to the rectifier, a sensor oscillator 58 connected to the voltage control portion, and a modulator 62 connected to the sensor oscillator 58, either directly
30   or via an optional intermediate oscillator 60. The modulator 62 is also connected to the resonator 52. A complete circuit diagram of the sensor module 1 is shown in Figure 8. By way of example, two alternative lists of the components suitable for use in Figure 8 are given
35   in Table 2 below.

Table 2

ELEMENT	EXAMPLE LIST 1	EXAMPLE LIST 2
C101	56pF	56pF
C102	2pF	4.7pF
C103	18pF	18pF
C104	100pF	100pF
C105	100pF	100pF
C106	47pF	22pF+5-22pF
C107	56pF	10pF
C108	33pF	5.6pF
C109	1uF	1uF
C110	1nF	1nF
D101	BAT17	BAT17
D102	BAT17	BAT17
IC101	74HC00	74HC00
L101	3.9uH	3.9uH
Q101	BST82	BST82
Q102	FDV301N	FDV301N
Q103	FDV301N	FDV301N
R101	30R	30R
R102	1M	1M
R103	24K	24K
R104	91K	240K
R105	330K	560K
R106	560K	1M
R107	1M	1M
R108	560K	560K
R109	680K	680K
R110	220K	220K
R111	12K	12K
S101	50-100pF	50-100pF
T101	15K	15K
Z101	BZX84C6V2	BZX84C6V2

As shown in Figure 8 the resonator 52 consists of
an inductor L101, with a series damping resistor R101,
in parallel with a capacitance C. The capacitance C is
made up of a main capacitor C_m (the network capacitor

5   C101, deliberately provided in the resonator network, in
series with the stray capacitance C_{st}: see Figure 5) and
a further, variable, capacitance (corresponding to the
capacitance C_v in Figure 5) provided by capacitors C102
and C103 and the gate capacitance of a transistor Q101

10   in the modulator 62. C102 includes internal stray
capacitance of the resonator 52.

Thus, the total capacitance C of the resonator 52
is distributed and includes, in addition to the network
capacitor C101, the modulator-coupled capacitance
(associated with Q101), any stray capacitance C_{st}, as

15   well as any diode capacitance associated with diodes
D101 and D102 in the rectifier 54. The resonant angular
frequency Ω is defined by the capacitance C and by the
inductance L of the inductor L101:

$$\Omega = \frac{1}{\sqrt{L \cdot C}} \tag{12}$$

20

The impedance Z_L of the unloaded resonator is given
by

$$Z_L = \frac{R + i \cdot \omega \cdot L}{1 - \omega^2 \cdot L \cdot C + i \cdot \omega \cdot C \cdot R} \tag{13}$$

where R is the resistance of the resistor R101 in

25   the resonator 52.

If the excitation frequency ω of the relay module 4
is expressed as a fraction α of the resonant frequency

$$\omega = \alpha \cdot \Omega \tag{14}$$

and the quality factor Q is defined by

$$Q = \frac{1}{R} \cdot \sqrt{\frac{L}{C}} \tag{15}$$

30

it follows that the impedance is given by

$$Z_L = \frac{R \cdot Q \cdot (1 + i \cdot \alpha \cdot Q)}{(1 - \alpha^2) \cdot Q + i \cdot \alpha} \qquad (16)$$

Equation 16 is modified if the resonator is loaded.

The rectifier 54 in Figure 8 is made up of diodes
D101 and D102 and a capacitive filter made up of the
capacitors C104 and C105. The two diodes provide
split-phase rectification, giving a DC voltage equal to
the peak-to-peak AC voltage developed across the
resonator 52 less the two diode voltage drops.

The voltage control portion 56 is made up of a Zener
diode Z101, NAND gate IC101d, n-channel field-effect
transistors (FETs) Q102 and Q103, resistors R107 to R111
and capacitor C110. The Zener diode Z101 acts as a shunt
to prevent over-voltage (more than 6.2V in this
embodiment). The remaining components in the voltage
control portion 56 operate to produce an ENABLE signal
which has the high logic level (H) when the supply
voltage produced by the rectifier 54 is greater than or
equal to a minimum voltage for proper operation of the
sensor oscillator 58. In this embodiment, for example,
the minimum voltage is approximately 2.4V.

Operation is as follows. When the sensor module is
first powered up, the gate-source voltages of the FETs
Q102 and Q103 are initially zero, so Q102 and Q103 are
off and the input to the NAND gate IC101d connected to
Q102 has the H level. The ENABLE signal therefore has
the low logic level (L). As the supply voltage produced
by the rectifier 54 increases, Q103 is partially turned
on and current flows through R109 and R108, until the
voltage across R8 is sufficient to turn on Q102. IC101d
then switches the ENABLE signal to the H level. The
capacitor C110 provides rapid positive feedback with R110
providing hysteresis so that the supply voltage at which
the ENABLE signal is switched from H to L (the supply

voltage turn-off threshold) is lower than the supply
voltage at which the ENABLE signal is switched from L to
H (the supply voltage turn-on threshold). The supply
voltage threshold (neglecting hysteresis) is determined
5   by the threshold voltages of Q102 and Q103 (which are
substantially equal to one another) and the ratio of R108
and R109. When the ENABLE signal has the L level the
current flowing through the feedback loop is set by R110;
R110 is switched to non-conducting when the ENABLE signal
10   is changed to the H level. The hysteresis is determined
by the ratio of R111 to R110.

The threshold voltages of Q102 and Q103 are
temperature-dependent, i.e. they drop with temperature.
This means that the supply voltage threshold
15   automatically adapts to ambient temperature of the sensor
module so that at higher temperatures the supply voltage
threshold is lowered. This is desirable because the
minimum operating voltage of further circuitry in the
sensor module, particularly NAND gates in the sensor
20   oscillator 58 which also contain FETs with threshold
voltages that are temperature-dependent in the same way
as the threshold voltages of Q102 and Q103, is also
lowered as the ambient temperature rises.

Incidentally, to some extent the current consumed by
25   the sensor module circuitry is self-regulating with
temperature. The current drawn by the circuitry tends to
rise with temperature (because the transistor threshold
voltages fall) but, as the current drawn by the circuitry
increases, the supply voltage falls so that the current
30   consumption falls back.

The sensor oscillator 58 includes a pressure sensor
S1 and a negative-temperature-coefficient (NTC)
thermistor T101. The pressure sensor S101 has a parallel
trimming capacitor C106, and the thermistor T101 forms
35   part of a resistor network with the further resistors
R103 and R104.

The sensor oscillator further includes resistors

R105 and R106, capacitors C107 and C108, and first,
second and third NAND gates IC101a to IC101c. Unlike a
conventional two- or three-gate RC logical oscillator,
which switches its capacitive element to give positive
5   feedback with its resistive element providing negative
feedback, the oscillator 58 in Figure 8 is designed to
use a single-ended capacitive element.

        In operation the pressure sensor S101 and trimming
capacitor C106 are alternately charged and discharged,
10   via a resistor network formed by T101, R103 and R104, by
the output of the NAND gate IC101a. The potential
difference between, on the one hand, the top plates of
the capacitors S101 and C106 and, on the other hand, the
output of the NAND gate IC101b (L when charging and H
15   when discharging) is divided by a potential divider
network made up of R105 and R106 and fed back to the
input of IC101c. When this feedback voltage reaches the
switching threshold of IC101c the NAND gates IC101a-c
switch and output of IC101b, which is connected to the
20   divider network formed by R105 and R106, is changed to
the opposite logic level. Effectively, this provides the
oscillator with separate threshold voltages for switching
when S101/C106 are charged and discharged.

        The capacitor C108 is connected in parallel with
25   R106 to provide rapid positive feedback and thus clean
switching. C107 is connected in parallel with R105 to
compensate for C108. The ratio of C108 to C107 is chosen
to match the ratio of R105 to R106 so that the same ratio
of divider is formed by both these capacitors and these
30   resistors.

        The oscillator 58 has a very low current
consumption, despite the fact that the resistive elements
are always conducting in a feedback loop around IC101a.
The majority of the current consumed goes into charging
35   and discharging the capacitors. However, the bulk of the
capacitance is not switched; only C107 and C108 in series
are switched. Thus, power consumption is lower than in a

conventional oscillator.

R105 and R106 act in opposition to the resistor network of T101, R103 and R104, and C107 and C108 form a capacitor in parallel with S101 and C106, so the charging/discharging network actually includes all the resistive elements and two different outputs, and the timing capacitance (S101 and C106) is supplemented by the other capacitive elements C107 and C108.

The basic time period t of the sensor oscillator is given by Equation 17:

$$T = \frac{2 \cdot (R_f + R_s) \cdot R \cdot (C + C_s)}{R_f + R_s + R} \cdot Ln \left(\frac{1 - \dfrac{R_f + R_s + R}{R_f + R_s} \cdot \left(\dfrac{R_f - R_s}{2 \cdot R_f} - \dfrac{C_s}{C + C_s} \right)}{1 - \dfrac{R_f + R_s + R}{2 \cdot R_f}} \right)$$

$$\ldots (17)$$

where R is the effective resistance of the network containing T101, R103 and R104, R_f is the resistance of the first portion R106 of the divider network, R_s is the resistance of the second portion R105 of the divider network, C is the timing capacitance (i.e. S101 in parallel with C106) and C_s is the effective capacitance of C107 and C108 in series.

Although the two variable terms R and C appear within the logarithmic term of equation 17, the variation of the logarithmic term with R and C is relatively small compared to the variation with R and C of the other term in equation 17. That other term is effectively an RC product if C and C_s are combined and the resistive term is equivalent to R in parallel with a resistor made up of R_f and R_s in series. Thus, with suitable component values, the resistive elements including the NTC thermistor T101 can provide an effective resistance that (at least away from the origin) is a good approximation to a power function of inverse absolute temperature.

Thus, the capacitive element of the sensor oscillator 58 conforms to equation 5 above, whilst the resistive element conforms to equation 6 above. Accordingly, it follows that the oscillator time period

5   conforms to equation 7 above, i.e. the oscillator frequency is an inverse power function of the quotient ρ (= P/T).

The sensor oscillator frequency varies, for example, in the range from 10kHz to 20kHz with ρ.

10   The output of the sensor oscillator 58 is applied to the modulator 62. The modulator comprises an n-channel metal-oxide-semiconductor field-effect transistor (MOSFET) Q101, a resistor R102 and a capacitor C103. The drain of the MOSFET Q101 is connected to the sensor

15   oscillator output, the source of Q101 is connected to the negative supply rail, and the gate of Q101 is connected via the capacitor C103 to the resonator 52. The gate capacitance of Q101 varies substantially with its drain-to-source voltage V_{ds}, particularly at low voltages.

20   Thus, the sensor oscillator output voltage modulates the gate capacitance of Q101. This gate capacitance, in series with the capacitance of the coupling capacitor C103 together with further internal stray capacitance (denoted schematically by C102 in Figure 8), is thus

25   connected in parallel with the main capacitance C_m of the resonator 52.

The gate capacitance of the MOSFET Q101 varies, for example, from 30pF at V_{ds} = 0V to 20pF at V_{ds} = 2.5V.

The coupling capacitance C103 serves two purposes.

30   Firstly, it attenuates the capacitance variation brought about by the modulator 62 significantly (e.g. taking the above gate capacitance variation from 30 to 20pF the capacitance variation at the modulator 52 is from 11.3pF to 9.5pF, a variation of 16%. This has the beneficial

35   effect of reducing the effect of the variation between individual transistors used for Q101. Secondly, the capacitor C103 reduces the gate voltage applied to the

gate of the MOSFET Q101 to approximately 37% of the
resonator voltage. Thus, Q101 stays below its conduction
level. Incidentally, in place of the MOSFET, a varicap
diode, or in fact any reverse biased diode could be used,
5   but such diodes generally have less capacitance variation
at low voltages and do not provide isolation between the
sensor oscillator 58 and the resonator 52.

Incidentally, as will be described later in more
detail with reference to Figure 11, although the
10   modulation of the resonator capacitance has an effect on
the resonant frequency of the resonator 52, it is the
sensor oscillator frequency (not the resonant frequency)
that is the quantity detected in the relay module 4 in
this embodiment.

15   As shown in Figure 7, it is possible to include an
additional intermediate oscillator 60 between the sensor
oscillator 58 and the modulator 62. This oscillator 60
is modulated by the output of the sensor oscillator 58 in
an intermediate frequency band between the frequency band
20   of the sensor oscillator and the excitation frequency.
The intermediate oscillator in turn modulates the load
resonator 52 via the modulator 62. This intermediate
frequency thus acts as a sub-carrier. This requires
additional detection circuitry in the relay module but
25   greatly enhances noise immunity as the intermediate
oscillator is unaffected by variations and noise in the
coupling. The modulation of the sub-carrier can be of
any form but frequency modulation is preferred as this is
simple to implement and gives a large improvement in
30   noise immunity.

Figure 9 shows a possible construction of the sensor
module 1. The module 1 has a housing 70 made, for
example, of a metal such as brass. An externally-
threaded tube 72, preferably made of the same material as
35   the housing 70, is formed integrally (e.g. by welding)
with the housing at the central part of the base of the
housing. A seal 74 is provided between the module 1 and

the wheel. The seal is made of, for example, rubber.

The housing 70 is capped by a diaphragm 76 which is, for example, a metal pressing. The diaphragm is welded or glued to the housing 70 in gas-tight manner. Within 5 the space defined by the diaphragm 76 and the housing 70 is housed a printed circuit board 78. The board 78 carries on its underside components 80, being the circuit components shown in Figure 8. On the top side of the board 78 a circular electrode 82 is formed by a copper 10 pad printed on the board. The electrode is covered by a thin dielectric sheet 84. The electrode 82 is connected to the circuitry on the underside of the board 78.

The space containing the board 78 can either be evacuated or air/gas-filled to a predetermined pressure 15 depending on the sensing characteristic required. A via hole 86 connects the two chambers above and below the board 78 so that internal pressure is equalised.

Within the tube 72 a connector socket 88 is fitted. The socket is insulated from the tube 72 and housing 70 20 by an annular insulator 90. The socket is connected by a spring 92 to the board 78.

In the use of the sensor module of Figure 9, the diaphragm 76 constitutes one electrode of a double plate capacitor, the other electrode being the electrode 82 25 printed on the board 78. The dielectric sheet 84 is therefore between the two electrodes.

When a pressure is applied the diaphragm 76 reacts by bending to become concave. As the pressure is increased the centre of the diaphragm comes into contact 30 with the dielectric sheet 84 which then partially supports the diaphragm 76. As the pressure increases, the area of the central portion of the diaphragm directly in contact with the dielectric sheet increases and thus the capacitance increases.

35 The pressure-capacitance characteristic approximates closely to a power function (as described earlier with reference to equation 5) from the point at which the

diaphragm 76 first becomes supported on the dielectric
sheet 84. The maximum pressure that can be applied is
limited by the mechanical properties of the material of
the diaphragm 76. If excessive pressure is applied and
the stress on the diaphragm exceeds the elastic limit for
the material, permanent deformation will occur and the
sensor will cease to be accurate.

The following expression defines the limit of
pressure that can be used:

$$P_{max} = \frac{1}{8} \cdot \frac{t}{h} \cdot \frac{\sigma_y^2}{E} \qquad (18)$$

where P_{max} is the maximum pressure, t is the
thickness of the diaphragm, h is the height of the
diaphragm above the dielectric sheet in the undeformed
state, σ_y is the yield stress (at the elastic limit) and
E is the Young's modulus for the material.

This limit implies a maximum diameter of contact
between the diaphragm and the dielectric. For a
diaphragm of diameter D, the maximum contact diameter
d_{max} is given by

$$d_{max} = D - 4 \cdot \sqrt{\frac{E \cdot t \cdot h}{\sigma_y}} \qquad (19)$$

Applying formulae 18 and 19, a diaphragm made from
phosphor-bronze with the following properties is
considered suitable for use: Young's modulus E = 110 GPa;
yield stress σ_y = 500MPa.

A diaphragm 0.4mm in thickness with a working
diameter of 20mm set at a height of 0.1mm above the
dielectric sheet 84 will take a maximum pressure of 5.5
bar. The range of capacitance will depend on the
dielectric material used and its thickness. If it is
typically 0.05mm thick with a dielectric constant of 3,
the capacitance can be expected to vary from 50pF at zero
pressure to 120pF at 3 bar.

As expected, when the electrode 84 printed on the top side of the board 78 is circular (i.e. a disc) the pressure-capacitance characteristic is close to a power curve over a substantial pressure range. If desired, the
5   pressure-capacitance characteristic can be modified by adjusting the shape of the electrode printed on the board, for example a clover-leaf shaped electrode could be used.

An example of the circuitry in the relay module is
10   shown in block diagram form in Figure 10. In Figure 10, the relay module circuitry includes a driver section made up of an excitation oscillator 70, a buffer 72 connected to the excitation oscillator 70, and a source impedance 74 connected to the buffer 72. The source impedance 74
15   is in turn connected to the fixed antenna 3 associated with the relay module concerned.

The relay module circuitry further comprises a receiver section made up of a detector 76 connected to the source impedance 74, an amplifier/filter 78 connected
20   to the detector 76, and a squarer 80 connected to the amplifier/filter 78. Optionally, the receiver section may also comprise a decoder voltage- controlled-oscillator 82 (in the above-mentioned case in which the sensor module contains an intermediate oscillator - 60 in
25   Figure 7) and/or a frequency divider 84. Finally, the relay module circuitry comprises a power supply regulator and current control section made up of a current sink 86 connected to the squarer 80, and a supply regulator 88.

The three sections of the relay module circuitry in
30   one embodiment of the present invention will now be described in more detail with reference to Figures 11(A) to 11(C).

Figure 11(A) shows the circuitry in the driver section. Exemplary components for the Figure 11(A)
35   driver section circuitry given in Table 3 below.

Table 3

ELEMENT	VALUE
C11	47uf 10V or 16V
C12	100nF
C13	22pF
C14	22pF
C15	100nF
IC1	74HC04
L1	3.3uH
R16	330R
R18	1M
X1	10MHz

The excitation oscillator 70 is constituted by
inverter IC1a, together with a ceramic resonator X1, a
resistor R18 and capacitors C13 and C14. The excitation
oscillator 70 produces a output signal whose output
frequency is determined by the resonant frequency of the
ceramic resonator X1, for example 10MHz in this
embodiment.

The buffer 72 includes a driver inverter IC1b which
squares the output signal of the oscillator 70 and four
inverter elements IC1c to IC1f connected in parallel with
one another to the output of the inverter IC1b.

One part of the source impedance 74 is provided by a
series resistor R16 connected to the output of the buffer
72. The buffer output is connected via a DC-blocking
capacitor C15 and optional inductor L1 to the fixed
antenna 3. If inductive coupling, rather than capacitive
coupling, is employed between the relay module and the
sensor module, a differently-valued inductor is connected
instead between the output and the fixed antenna.

In the receiver section, shown in Figure 11(B), the
detector 76 is made up of a diode D1, capacitor C5 and

resistor R5. The detector serves to detect the voltage
envelope at the buffer output on the negative side of the
excitation envelope.

The detection signal produced by the detector 76 is

5   passed to the amplifier/filter 78. The amplifier/filter
78 has first and second amplification stages in series.
The first stage, made up of resistors R6 and R7,
capacitors C6 and C7, diodes D2 and D3 and operational
amplifier IC2a, operates as a non-inverting amplifier

10   having a voltage gain of approximately 11 at 15kHz and
includes filtering. Low-frequency rejection is achieved
by the coupling capacitor C6, and high-frequency
rejection is achieved by the feedback capacitor C7. The
diodes D2 and D3 in the feedback loop provide limiting of

15   high-level input signals.

The second amplification stage, made up of resistors
R8 to R11, capacitors C8 and C9 and operational amplifier
IC2b, operates as an inverting amplifier having a voltage
gain of approximately 11 at 15kHz. Again, the coupling

20   capacitor C8 provides low-frequency rejection and the
feedback capacitor C9 provides high-frequency rejection.
The resistors R8 and R9 provide a voltage divider network
for biasing the output of the second amplification stage
to a potential of approximately one third of the supply

25   voltage.

The output voltage of the amplifier/filter 78 is
applied, via a resistor R12, to a further operational
amplifier IC2c in the squarer 80. A resistor R15
provides IC2c with positive feedback.

30   The output of the squarer is connected to the
current sink 86.

Exemplary components for the Figure 11(B) receiver
section are given in Table 4 below.

35

Table 4

ELEMENT	VALUE
C4	1uF
C5	4.7nF
C6	2.2nF
C7	100pF
C8	2.2nF
C9	100pF
C10	100nF
D1	BAT17
D2/D3	BAV199
IC2	MC33204D
R5	24K
R6	4.7K
R7	100K
R8	22K
R9	12K
R10	4.7K
R11	100K
R12	1K
R13	10K
R14	1M
R15	100K

As shown in Figure 11(C), the current sink 86 is made up of resistors R1 to R4 and R17, thermistor TH1, PNP bipolar transistors Q1 and Q2, NPN bipolar transistors Q3 and Q4 and n-channel FET Q5.

The transistors Q1 and Q2 are connected in a current mirror shunt configuration, the gain being set by the ratio between the resistors R1 and R2 at 100. The current mirror shunt is coupled by the transistor Q3 and resistor R4 to the parallel-connected thermistor TH1, resistor R3 and FET Q5. The gate of the FET Q5 is driven

by the output of the squarer 80.

When the FET Q5 is turned off by the squarer output, no current passes through the transistor Q5 and the current that is sunk by the current sink 86 is a variable current determined by TH1 with R3 and R4. When Q5 is turned on by the squarer output, on the other hand, the drain of the FET Q5 becomes near to ground potential, so that a fixed current of approximately 1mA flows through the current sink (the emitter potential of the transistor Q3 is fixed at approximately 4.3 volts because its base is tied to the supply voltage +V (=+5 volts in this embodiment), and the resistor R4 has a value of 4.3 kΩ. The transistor Q4 and resistor R17 serve as a bypass to limit the current passing through Q1. The current flowing through Q1 is approximately 1mA to match the current flowing through Q2.

Whatever current is sunk through the transistor Q3 is amplified by a factor of 100 by the current mirror so that, when Q5 is turned on, a fixed high-level current of 100mA is drawn through the current mirror, whereas when Q5 is turned off, a variable low-level current dependent on the ambient temperature, as measured by the thermistor TH1, is drawn.

The inclusion of the thermistor TH1 to measure ambient temperature is not an essential feature. For example, ambient temperature could be measured independently of the relay modules and supplied to the display module. Many vehicles already include ambient temperature sensors capable of providing ambient temperature information to the display module. It is, however, envisaged, for example, that the relay module for the spare wheel may prove to be a convenient location for the ambient temperature sensor, in which case a circuit (as in Figure 11(C)) that draws a current proportional to (or dependent otherwise on) temperature can be used and the data transmitted to the display module through the hard wire link to the display module.

A suitable decoder for use in the display module will be
described later. If the relay module does not include an
ambient temperature sensor, the current mirror shunt
(current regulating shunt) can be omitted, as in this

5   case the magnitude of the current sunk by the current
sink 86 in the relay module is not relevant; only the
frequency of variation of the current sunk is measured.

Finally, the power supply regulator and current
control section shown in Figure 11(C) comprises a

10   standard integrated circuit voltage regular REG1 which
derives the supply voltage (+5V) for the receiver and
driver sections from the power supply voltage supplied to
the relay module from the display module (+12V).

A capacitor C1 provides voltage decoupling and a

15   Zener diode Z1 protects the relay module from excessive
supply voltages.

Exemplary components for the Figure 11(C) circuitry
are given in Table 5 below.

20   Table 5

ELEMENT	VALUE
C1	100nF
Q1/Q2	BCV62C
Q3	BC846
Q4	BCP55
Q5	FDV301N
R1	4.7R
R2	470R
R3	7.5K
R4	4.3K
R17	680R
REG1	LM78L05
TH1	4.7K
Z1	14V

Operation of the relay module and sensor module is
illustrated in the waveform diagrams of Figures 12(A) to
12(H). Figure 12(A) shows the voltage applied to the
5   fixed antenna 3 by the driver section of Figure 11(A).
The frequency (set by the ceramic resonator X1) is 10MHz.
The peak-to-peak amplitude is approximately 5V.

Figure 12(B) shows the output voltage of the sensor
oscillator 58 in the sensor module. This voltage has a
10   frequency in the range from 10kHz to 20kHz dependent on
the pressure P and temperature T measured by the pressure
sensor S101 and thermistor T101 respectively. The peak-
to-peak amplitude is approximately 3V. Incidentally, it
will be appreciated that the waveform diagrams of Figure
15   12 are only schematic and that in this embodiment the
frequency of the voltage in Figure 12(A) is between 50
and 100 times greater than the frequency of the voltage
in Figure 12(B).

Figure 12(C) shows the voltage developed across the
20   resonator 52 in the sensor module. Referring back to
Figure 4, it can be seen that, although the capacitance
of the resonator is modulated by the sensor oscillator
output, the resonator voltage (V_L) does not vary
significantly (for excitation frequencies in the range
25   from 0.85 or less to 0.97 or more of the resonant
frequency of the resonator 52). This means that a
sufficiently high amount of power can be transmitted from
the relay module to the sensor module irrespective of
variations in the sensor oscillator output voltage.
30   (N.B. the resonator voltages in Figure 4 are normalised).

Figure 12(D) shows the voltage developed at the
junction between the source impedance R16 and the
coupling capacitor C15 in the driver section of Figure
11(A). Referring to Figure 3, it can be seen that when
35   the excitation frequency is within the range from lower

-41-

than 0.85 to greater than 0.97 times the resonant
frequency of the resonator 52, a change in the resonator
capacitance (as brought about by the modulator 62 at the
sensor oscillator output frequency) can produce a

5   measurable change in the voltage developed across the
source impedance in the relay module driver section. The
magnitude of the voltage variation is not relevant in
this embodiment; the quantity that is being measured is
its frequency of variation.

10   In Figure 12(E) the detection signal produced by the
detector 76 in the relay-module receiver section (Figure
11(B)) is shown. Because of the diode D1 in the detector
76, the detector 76 detects the negative envelope of the
voltage at the source impedance R16. Typically, the

15   peak-to-peak variation in the output voltage of the
detector 76 is 2.5% of the excitation voltage for a 1%
change in the resonator capacitance.

               Figure 12(F) shows the output voltage of the
amplifier/filter 78 in the receiver section, and Figure

20   12(G) shows the output voltage of the squarer 80.

               Finally, Figure 12(H) shows the current drawn by the
relay module; as explained hereinafter, the frequency
(and possibly also the magnitude) of the variation of the
current drawn is the quantity that is measured by the

25   display module. The current drawn is modulated between a
fixed, high value of approximately 100mA and a variable,
low value (shown in the Figure as 40mA, by way of
example) dependent on ambient temperature as measured in
the relay module.

30   In a case where an intermediate oscillator is
provided in the sensor module, the desired signal
representing the measured quotient ρ must be retrieved by
demodulation of the sub-carrier. Assuming the sub-
carrier is frequency modulated, a phase-locked-loop (PLL)

35   method of demodulation is most appropriate. The output
from the squarer 80 is supplied to a phase-locked-loop
circuit and is compared with the output of a voltage-

controlled oscillator (VCO) (82 in Figure 10). A
difference signal is generated to adjust the frequency of
the VCO to maintain phase locking between the squarer and
VCO output signals. The VCO control voltage is then a

5   copy of the original modulating signal. This is
amplified and squared and drives the current sink 86.

A digital divider (84 in Figure 10) can be added
between the squarer 80 and the current sink 86 to reduce
the frequency of signal between the relay module and the

10   display module. This may be desirable if the connection
between the modules is likely to be prone to noise in the
frequency band of the signal.

Figure 13 shows a block diagram showing one example
of the circuitry in the display module 5 in an embodiment

15   of the present invention. The circuitry comprises a
power regulator 90, a clock oscillator 92, a
microcontroller 94, a multiplexer 96, signal converters
98, and a display 100. Optionally, a sounder 102 and an
ambient pressure sensor circuit 104 may be provided.

20   The microcontroller 94 incorporates at least a
counter for frequency measurement purposes, and an
analog-to-digital section (ADC) for measurement of
ambient temperature. The microcontroller must have
sufficient outputs to control the multiplexer 96 and to

25   drive the display 100.

The multiplexer 96 is a multi-input/single-output
standard digital multiplexer with as many inputs as there
are relay modules (a further input may be required for an
ambient pressure sensor circuit 104).

30   One of the signal converters 98 is assigned to each
of the relay modules. As indicated above, the output
signal of each relay module is passed as a current signal
on the power supply line to the relay module concerned.
Each signal converter in the display module is therefore

35   required to convert the current signal into a voltage
signal for input, via the multiplexer 96, to the
microcontroller 94.

The design of the signal converter depends on the type of current signal produced by the relay module. If the relay module produces only a digital output signal of the same frequency as (or, if a frequency divider is used

5   in the relay module, a predetermined fraction of) the sensor oscillator frequency, a signal converter of the kind shown in Figure 14 can be used. Exemplary component values for use in the Figure 14 signal converter are given in Table 6 below.

10

Table 6

ELEMENT	VALUE
Q201	BC77
R201	8.2R
R202	6.8K
R203	5.1K
R204	3.3K

In the Figure 14 circuit an in-line current sensing

20   resistor R201 provides sufficient base-emitter voltage to turn on a PNP transistor Q201 when the current drawn by the relay module exceeds a predetermined threshold value, in this case around 75mA. An input signal INPUT for application to the microcontroller 94 (via the

25   multiplexer 96) is derived from the collector of the transistor Q201 after potential dividing by resistors R202 and R203. A diode D201 provides over-voltage protection for the INPUT signal.

If the relay module produces an analog current

30   signal (e.g. a current signal dependent on ambient temperature as in the Figure 11(C) circuit) additional circuitry as shown in Figure 15 can be included in the Figure 14 signal converter. Two alternative exemplary component lists for use in the Figure 15 circuitry are

35   given in Table 7 below.

Table 7

ELEMENT	EXAMPLE LIST 1	EXAMPLE LIST 2
C301	100nF	100nF
C302	10uF	47uF
Q301	BC177	BCV62
Q302	BC177	BCV62
R301	10R	4.7R
R302	1K	470R
R303	10K	10K
R304	100K	22K

The Figure 15 circuitry senses a minimum current
flowing in a line that carries a DC current and an AC
current (it is not permitted for the current flowing to
reverse in direction), and produces a voltage
proportional to that sensed minimum current. Transistors
Q301 and Q302 form a 100:1 ratio current mirror by virtue
of the resistance ratio of their respective emitter
resistors R302 and R301. The transistor Q302 and a
capacitor C302 and a resistor R304 together form a
negative envelope detector. In this detector Q302
functions effectively as a diode. Only the low-level
current flowing through R301 is sensed because C302
maintains an essentially constant base voltage on Q301
and Q302, relative to the supply line potential, so that
when the current through R301 is increased Q302 turns off
for a short period so there is no change in the base bias
to the transistors. Q301 continues to conduct at a level
appropriate to the low-level current. The collector
current of Q301 is converted to a voltage by a resistor
R303. This voltage is supplied, in addition to the INPUT
signal produced by the basic Figure 14 signal converter,
to the microcontroller 94. The Q301 collector current is
1/100th of the low-level current flowing through R301 so
the voltage across R303 is 100mV/mA of that low-level

current.

If an ambient pressure sensing circuit (104 in Figure 13) is used, this may advantageously be in the same form as the sensor oscillator 34 in the sensor
5   module. In this case, the square-wave output of the ambient pressure sensor circuit can be applied to a further input of the multiplexer directly, and no intermediate signal converter is required.

The microcontroller 94 receives the signal-converted
10   INPUT signals from the relay modules in turn by sequencing the multiplexer 96. The signals are fed to an internal counter which counts the number of cycles over a fixed interval. Each signal is thus converted into a digital value representing frequency. A look-up table is
15   then used to convert this digital value into the corresponding value of pressure-temperature quotient ρ, based on equation 7 above. In the case of a relay module that additionally produces an analog current signal representing ambient temperature, the analog voltage
20   produced by the additional circuitry of Figure 15 is also converted by the microcontroller's internal ADC into a digital value of ambient temperature T_a. The gauge pressure for each sensor module is then derived from the quotient ρ, the ambient temperature T_a and the ambient
25   pressure P_a using equation 1 above. The gauge pressure value P_g is thus available for output as a digital value, or can be converted by the microcontroller 94 into whatever form of output signal is required.

The microcontroller functions can be incorporated
30   into an existing on-board microcontroller or microcomputer if desired, provided that this has the necessary resources.

The power regulator 90 may be a standard monolithic regulator, capable of providing a clean regulated supply
35   for the microcontroller and supporting circuitry.

The clock oscillator 92 is required to provide a reference frequency signal for counting purposes and

-46-

therefore its accuracy affects the accuracy of measurements. Accordingly, a crystal or ceramic resonator is preferred for use in the clock oscillator 92, with the oscillator amplifier circuitry being
5   incorporated conveniently in the microcontroller 94.

For the display 100, any suitable type of display can be used (LCD, LED, plasma, etc.), preferably driven directly from the microcontroller 94. The form of the display can be numerical or by bar chart or simply as
10   fault warnings or any combination of these to suit the vehicle designer's preference.

If desired, the sounder 102 may be provided to give an audible warning in the event that the measured gauge pressure is below or above a threshold. The sounder may,
15   for example, be a piezo-electric transducer driven directly by the microcontroller. Alternatively, the microcontroller could produce an audio output triggering signal for triggering an existing on-board audio warning device.

20   It will be appreciated that many modifications and variations are possible on the arrangements described hereinbefore. Some of these will now be described, by way of example, below.

On vehicles, such as heavy commercial vehicles,
25   where two wheels are mounted on a common stub axle, the antennae arrangement shown in Figure 6 will be inappropriate. The requirement for interchangeability of wheels remains, but steered wheels are usually single whereas driven or load-bearing wheels are often twin.

30   In this case, it is preferable to employ a link, between the sensor module and the wheel antenna, that is attached after the wheel is mounted. Coaxial cables with connectors at each end can be removed prior to dismounting the wheel and replaced after remounting. An
35   arrangement of this kind is shown in Figure 16.

In Figure 16 a multi-wheel axle arrangement is shown having two wheels 110A and 110B, each having an

associated tyre 112A or 112B. The wheels are mounted on a common axle 114 having a hub 116. A brake drum 118 enclosing a brake shoe 120 is accommodated in the central area of the inner wheel 112A.

5   In this arrangement, separate wheel antennae 2A and 2B are required for the two wheels 112A and 112B respectively and these are contained within the brake drum 118. The two wheel antennae 2A and 2B are mounted on opposite faces respectively of a disk-shaped carrier 10   122 which is mounted on the hub 116. Each wheel antenna 2A or 2B has an associated, opposed, fixed antenna 3A or 3B. These fixed antennae are mounted, with their respective relay modules 4A and 4B, on a brake back plate 124. As shown, the fixed antenna 3A is on the inside of 15   its associated wheel antenna 2A, whereas the fixed antenna 3B is on the outside of its associated wheel antenna 2B. Each wheel antenna has a coaxial cable connection 126A or 126B to its associated sensor module 1A or 1B. The connections 126A and 126B are made via 20   holes in the hub flange, in the brake drum and in the wheel discs. Alternatively, via holes may be made through the central axes of special wheel studs. Connections (not shown) from the relay modules 4A and 4B to the display module 5 (also not shown) are via holes 25   (not shown) in the brake back plate 124.

     The Figure 16 arrangement can also be used with a single wheel. A similar arrangement can be used with disc brakes.

     In the Figure 7 embodiment described above, the 30   sensor module has only one item of data to transmit to the relay module. If transmission of more than one item of data is required, time-division-multiplexing can be used, as shown schematically in Figure 17.

     The modified sensor module shown in Figure 17 35   includes a resonator 52, rectifier 54 and modulator 62, as in the sensor module circuitry shown in Figure 7.

     In place of the sensor oscillator 58 in Figure 7,

the modified sensor module of Figure 17 includes N voltage-controlled-oscillators (VCOs) 158_1 to 158_N. Each VCO 158 receives an associated input signal which it is desired to transmit to the relay module. The input

5   signal controls the oscillation frequency of the VCO concerned. The VCO outputs are connected to respective inputs of a multiplexer 160.

The sensor module of Figure 17 also comprises a divider 162 connected to the resonator 52, a counter 164

10   connected to the divider 162, and an encoding logic circuit 166 connected to the counter 164 and also connected to the multiplexer 160 for applying an N+1th input signal and a control signal thereto.

The divider 162 uses the resonator excitation

15   frequency as a reference frequency and divides this by an appropriate factor to produce a clock signal which is applied to the counter 164. The counter 164 counts a predetermined number of pulses of the clock signal and then increments its output. Thus, the counter produces

20   an output signal having a period t_{blk}, corresponding to one block duration of the time-slice multiplexing. In the encoding logic circuit 166, a control signal pulse is applied to the multiplexer 160 in response to each output-signal pulse of the counter 164. At every N+1th

25   output-signal pulse of the counter 164 the encoding logic applies a synchronising block signal to the N+1th data input of the multiplexer 160. Thus, the N data inputs to the multiplexer 160 are selected in turn, each of them being allocated the block duration t_{blk}. After the N

30   blocks follows a synchronising block, also of duration t_{blk}, provided by the encoding logic circuit 166.

The synchronising block is used by decoding logic in the display module to reconstruct the data appropriate to each input signal.

35   In the case of a trailer, particularly one with many wheels, a separate connection between tractor and trailer for each wheel can be avoided by applying multiplexing to

the relay modules. This can reduce the connections to a
single wire plus an earth return. The multiplexer,
normally contained in the display module, is in this case
built into a separate unit that is mounted on the

5   trailer. This unit generates a reference signal to
synchronise the time-slicing and powers each relay in
turn. As many as 40 wheels per second could be checked
without significant loss of accuracy.

In place of the signal converter circuit shown in

10   Figure 14 it is also possible to use an opto-isolator
comprising a light emitting diode (LED) and
phototransistor. In this case, the LED may be connected
in parallel with an in-line current sensing resistor such
that the voltage drop across the resistor at the

15   appropriate threshold current is equal to the diode
voltage drop of the LED. Then, the phototransistor,
connected with a collector load, will conduct when the
threshold current is exceeded.

Any suitable type of resonator can be used. If an

20   active component (instead of a passive component) is used
in the resonator the value of the component which
influences the resonant frequency of the resonator may be
an effective value obtaining only in use, rather than a
permanent or real value. For example, a modulator could

25   utilise the Miller effect by connecting a capacitor
between the negative input and the output of an
amplifier. In this case, the effective capacitance as
seen at the input is multiplied by the gain of the
amplifier. In a modulator a variable gain amplifier can

30   be constructed in which only a current is changed; all
component values themselves remain unchanged.

Instead of a plate-form antenna, described above in
the case of capacitive coupling, any form of antenna can
be used, for example a conductive brush or a wire mesh.

35   The antenna can be flexible, for example as described
later with reference to Figure 19.

The modulator 62 may, as mentioned above, be

implemented by using a varicap diode but there will be some mixing of the modulation signal with the resonator voltage in this case.

In a case where only a square-wave signal is to be transmitted, additional reactance may be switched into the resonator to perform modulation. Switching in small values of capacitance, although theoretically conceivable, may prove difficult in practice because of the output capacitance of the switching transistor. This problem can be overcome by switching in additional inductance.

In the relay module, a filter may be included between the excitation oscillator 70 and the buffer 72 to improve sine-wave purity if particularly stringent constraints on EMC emissions due to harmonics are imposed. In this case, the buffer 72 would need to be implemented as a linear amplifier, rather than as a digital circuit.

It is also possible to link the relay module and sensor module by inductive coupling, i.e. using two inductively-linked coils as in a transformer. In this case, the inductive element of the load impedance Z_L is due to the leakage inductance of the transformer. With loosely coupled coils this can be quite large and variable. By including an additional series inductor as part of the link (see, for example, Figure 11(A)), the variations in leakage inductance may be swamped and theory analogous to that for capacitive coupling can then be applied. In this case, the excitation frequency will be higher than the natural resonant frequency of the load resonator. Greater power can generally be transmitted and the overall impedance can be lower than for capacitive coupling.

It is also possible to link the transmitter (sensor module) and receiver (relay module) using a hard-wire link with, for example, a fixed inductor included in the hard-wire link. Such an arrangement could be used, for

example, to link a remote control console to its host
unit, the remote control console requiring power from the
host unit and transmitting one or more control signals to
the host unit. The hard-wire link could be, for example,
5   a single coaxial cable.

Next, an extension of the detuned resonator
principle will be described which can provide for bi-
directional signalling. When a detuned resonator circuit
is operated there exists an excitation frequency at which
10   the voltage on the load resonator reaches a maximum.
Operating around this point there is very little change
in load voltage with small variations in the reactive
components of the resonator, while at the same time there
is substantial change in the load current.

15   For example, operating at this frequency a ±2%
change in resonator capacitance C can provide a ±10%
change in load current but only a -0.5% change in load
voltage. This means the change in current is forty times
the change in voltage.

20   This property can enable the resonator to act as a
receiver of incoming signals which vary the voltage
without confusion with outgoing signals which vary only
the current.

If the excitation voltage is amplitude modulated
25   with a signal which it is desired to transmit from the
source to the load, this desired signal can be recovered
at the load by detection with a standard voltage
amplitude detector. Signals can be transmitted
simultaneously from the load to the source without
30   confusion at the load resonator.

The signal detected at the source resistance will be
a mixture of both the current signal from the load
resonator and the voltage signal supplied by the source.
However, if the sensing signal taken from the source
35   resistance is demodulated with the desired signal being
transmitted from the source to the load, prior to the
sensing signal being passed to the detection circuitry at

the source, the outgoing signal from the source will be rejected and the incoming signal from the load recovered.

Thus, bi-directional simultaneous signalling can occur without the need for frequency shifting or multiplexing, using full bandwidth in both directions.

Figure 18 shows a block circuit diagram of an arrangement in which the relay (source) and sensor (load) modules are modified to permit bi-directional signal transfer. In Figure 18, a modulator 182 is interposed between the excitation oscillator 70 and the driver 72 in the source. The modulator 182 includes an analog multiplier which modulates the amplitude of the excitation signal produced by the excitation oscillator in accordance with a signal DATA IN which it is desired to transmit to the load. As described previously, the amplitude-modulated excitation signal is buffered and supplied via a source resistor 74 to the reactive link coupling the source to the load.

At the load, a detector 188 is included which detects the voltage envelope across the resonator 52 to produce a detection signal DATA OUT from which the signal DATA IN applied to the modulator 182 in the source can be derived.

The voltage across the source resistor 74 is sensed and applied to an inverting input of an inverting amplifier 186 in a demodulator 180. A non-inverting input of the amplifier 186 is set to a predetermined bias potential. The demodulator 180 also includes a further analog multiplier 184, corresponding to the analog multiplier in the modulator 182, connected in the feedback loop around the amplifier 186.

The analog multiplier 184 in the demodulator 180 also receives the DATA IN signal, and accordingly the amplifier 186 operates as an analog divider. The sensing signal produced at the output of the amplifier 186, which sensing signal is used for subsequent detection purposes in the source, is therefore not affected by the amplitude

modulation of the excitation signal.

The Figure 18 circuit is applicable to any type of reactive link (capacitive or inductive) provided that the appropriate detuning between the excitation frequency and the load resonator is used.

Instead of simultaneous bidirectional signalling it would be possible to use time-division multiplexing in which the relay module would transmit to the sensor module in one phase and then the sensor module would transmit to the relay module in the next phase. In this case the demodulator in the relay module could be omitted as detection in the relay module of the incoming signal would not be affected by amplitude modulation of the outgoing signal.

Furthermore a bidirectional system could be produced in which one relay module is coupled simultaneously to more than one sensor module. In this case, it is not necessary for every one of the sensor modules to include a detector (188 in Figure 18). Only some of the sensor modules, requiring the facility to receive signals from the relay module, might have such a detector.

Component tolerances are more critical when bi-directional signal transfer is to be performed if the incoming and outgoing signal separation at the load is to operate satisfactorily.

The bi-directional signal transfer can also be used with a hard-wire link between the source and the load. In this case, for example, a remote control console which has both control and status display functions (such as a keypad with status indication) could be connected to a host unit with just a single coaxial cable.

The signal transmission technique described above in relation to tyre pressure measurement can also be used to advantage in a number of other applications. The ability of circuits incorporating a detuned resonator to transmit data simultaneously in both directions can be used not only to reduce system complexity but also to provide

security. A detuned resonator circuit also reduces cost
when used for single-direction data transmission because
of its inherent tolerance to component-value variations.
Although it is more suited to low-power applications, the
5   very localised field and EMC immunity of low-power
electric field (capacitive) coupling, allied to the
simplicity and freedom of the antennae design, gives the
capacitive coupling technique major advantages over
existing magnetically-coupled transmission systems.

10   A number of further applications of the signal
transmission technique embodying the present invention
will now be described briefly.

          Firstly, the powering of, and transmission of data
to and from, many types of sensors on rotating or
15   reciprocating parts of mechanical equipment always
presents problems. A coupling method embodying the
present invention is applicable generally to all such
applications and provides the features of being
non-contact, localised and highly-immune to
20   electro-magnetic interference. The method is also
capable of operation in wet and oily environments. For
example, the technique can be applied to measurement of
torque transmitted via a rotating shaft. Strain gauges
mounted on the shaft, along with signal conditioning
25   circuitry and the relevant sensor module circuitry, can
be powered and sensed using the coupling method with
antennae concentric with the shaft.

          Secondly, embodiments of the present information can
provide secure data transmission. When a detuned
30   resonator circuit is used to transmit data bi-
directionally, the two data signals are effectively
multiplied together as a mixed signal. At the source the
outgoing and incoming signals are mixed together. To
separate the incoming signal from the outgoing signal it
35   is therefore necessary to effectively divide the mixed
signal by the known outgoing signal. Without the
locally-available information at the source regarding the

outgoing signal the mixed signal cannot be separated.
This means that the connection between the source and the
link reactance is data secure when two signals are being
transmitted.

Applications which require this form of security
over wire links can also be provided by embodiments of
the present invention. For example, in a system where
data is to be transmitted securely from source to load,
the load can be powered by the incoming transmission and
can be modulated with a locally-generated random signal
that will effectively secure the connection.

Embodiments of the present invention can also
provide electronic keys and locks. A key based on the
sensor module can be of the non-contact type and will not
require batteries.

For example, a key circuit can be based around one
or more sequencing counters which transmit a coded
sequence in response to one or more received sequences.
If several sequences are used and the transmission of
each sequence is dependent on satisfactory completion of
the previous call and response, neither the lock nor the
key can be interrogated independently to uncover the key
sequences being used. Because close coupling is used,
interception of the sequences would not be possible.
Additionally, the use of simultaneous bi-directional data
transfer could be used to provide even greater security
against the interception of signals.

Several different keys could be used with a
particular lock, and each individual key could be
identified. Standard encryption algorithms can be used.
Reprogrammable keys could be made using EEPROM
technology, so that the coding is changed with every use.

Embodiments of the present invention are also
suitable for use in tagging applications where it is not
practical to bring the key to the lock but where the lock
can be brought to the key, for example with a hand-held
reader.

Embodiments of the present invention can also be applied to so-called smart cards. These are cards with built-in integrated circuit chips. Conventionally, these cards have used electrical contacts for power and signal

5   transmissions between the card and a card reader. Inductive coupling has been considered for use as a non-contact method of achieving these functions but to operate this successfully, correct alignment of the coupling coils must be achieved, which is difficult in

10   practice.

In an embodiment of the present invention applied to a smart card, capacitive coupling can be used to provide a wider positioning tolerance when the card is coupled to the card reader. Furthermore, because capacitive

15   coupling relies on an electric field which is less pervasive than a magnetic field, a capacitive coupling would be less prone to electromagnetic interference. The ability of detuned resonator circuits to pass signals bi-directionally and simultaneously could also be employed

20   to advantage on smart cards.

Because embodiments of the present invention employ a non-contact form of coupling and the antennae can be insulated, such embodiments are suitable for use, either for sensing purposes or for control purposes, in areas

25   which must be intrinsically safe. Embodiments of the invention are particularly suitable for use in applications where fluid sealing is a problem, as the source and the load can each be independently sealed. Where mechanical vibration is a problem and contact

30   methods might be prone to fracture due to fatigue or to failure induced by tribological effects such as static build-up, a non-contact system embodying the present invention can provide a simple solution.

Other embodiments of the present invention can be

35   applied to pointing devices such as a computer mouse. In this case, a cordless computer mouse, incorporating one antenna, is movable over a mouse pad incorporating a

fixed antenna.   The mouse pad has a hard-wire connection
to the computer.   Standard mouse technology can be used
with the addition of encoding circuitry in the mouse and
decoding circuitry in the mouse pad.   In one possible

5   implementation, the link technology can be extended by
using a three-phase drive connected to strip antennae in
the pad.   The mouse has two antennae to complete the
circuit, for example a primary circular antenna
concentric with an annular return antenna.

10   The antennae are arranged so that the inner one of
the mouse antennae has a diameter equivalent to one strip
of the fixed antennae in the pad.   The return antenna has
a mean annular diameter equal to three times the pitch of
the fixed antennae strips and a radial width equivalent

15   to one strip.   In this way, the two antennae on the mouse
are subject to a single phase of fixed voltage.

         To detect the return signal, three separate
detectors are used, one on each phase, and the signals
are then summed to give a single signal that is

20   independent of the balance between the phases at any
given time.

         There are other applications in which it is
advantageous to have a manual input device which has no
hard-wire coupling to its host unit.   An embodiment of

25   the present invention can be applied to connect unpowered
manual input devices such as keypads to powered host
equipment.   This may be desirable for safety or security
reasons, such as maintenance-only access, protection
against abuse etc.   In one embodiment, a keypad matrix is

30   connected to an encoder that transmits a coded signal to
represent the pressing of a key.   The keypad only has to
be brought into close proximity to the antennae surfaces
to operate.

         Similarly, remote wire-linked consoles are commonly

35   used to control and receive status information from host
equipment.   Such consoles are powered by the equipment
they serve and usually require separate wire connections

for power and for signals in each direction. This can be reduced to a single coaxial or twisted pair cable by use of an embodiment of the present invention, substantially reducing cabling costs and complexity.

5   Another embodiment of the present invention can be applied to pressure sensing in buoyancy compartments of rigid inflatable boats (RIBs) and other inflatables.

RIBs are typically constructed with a rigid base to the hull and a number of inflatable compartments, or air

10   chambers, which form the sides of the hull. These boats have inherent buoyancy, provided that they remain inflated, and unlike a traditional hull can be relied upon to stay afloat even if they ship large quantities of water.

15   RIBs are widely used as pleasure craft and for coastguard duties. The inflatable sides of the hull make them particularly suitable where there is a high risk of collision and so RIBs are commonly used for off-shore rescue work.

20   The inflatable compartments on these vessels are usually inflated to a pressure between 0.2 and 0.5 bar and the pressure must be checked regularly to ensure proper inflation. In the event of a compartment leaking air, buoyancy will be maintained down to quite low

25   pressures, but the structural integrity of the vessel may suffer.

The gas-permeability of the air chamber membrane is such that pressure will not be maintained indefinitely. Accurate pressure monitoring can give advanced warning of

30   excessive leakage and can indicate which compartments need attention. Thus, in a preferred embodiment of the present invention, each compartment will be subject to continuous pressure sensing, and a central status display will be provided at the cockpit or bridge of the vessel,

35   so as to reduce maintenance costs and provide a safety warning.

Although it would be possible to incorporate

pressure sensing equipment in the compartment valves on
some vessels, in many situations this is an inappropriate
place to site such equipment because it may interfere
with the inflation operation and jeopardise the integrity
5   of the valve.

        An embodiment of the present invention can provide
solutions to these problems as the sensor can be placed
within the compartment away from the valve at any
convenient point, and power and data can be transmitted
10   through the air chamber membrane without any alterations
to the structural integrity of the compartment.

        Figure 19 shows an example of the possible
arrangement of the pressure sensing apparatus for one
compartment of a RIB.

15   The compartment 200 is bounded by a membrane 202
which has, attached to its inside, a first flexible
waterproof patch 204, and attached to its outside a
second flexible waterproof patch 206. Each patch is
attached to the membrane 202 by a thin layer of adhesive
20   material 208. Each patch is in the form of an insulating
rubber moulding and is approximately 75mm in diameter and
10mm thick at the centre.

        The first patch contains a sensor module 1',
generally similar in construction to the sensor module
25   described previously with reference to Figures 7 to 9.
However, in this case, the externally-threaded base
portion is omitted to leave the sensor module 1' in the
form of a disc. The first patch 204 further comprises
two antennae 2C and 2D. The antenna 2C is in the form of
30   a central disc. The antenna 2D is annular and extends
around the circumference of the antenna 2C. Each of the
antennae 2C and 2D is made of conductive rubber material.
Internal connection wires 210 connect the sensor module
1' to the electrodes 2C and 2D. The connection wire 210
35   connecting the sensor module to the electrode 2D may be
connected (e.g. by welding) to the sensor module casing
if the sensor module casing is connected electrically to

one of the plates of the sensor-module capacitor (as in Fig. 9). This avoids the need for a hole in the casing for the connection wire to pass through.

The sensor module 1' includes a pressurised chamber contained under a conducting diaphragm 76', as described above in relation to Figure 9. The diaphragm 76' is covered by a thin section of the rubber moulding of the first patch 204 for environmental protection. This thin section is of negligible stiffness relative to the diaphragm 76' itself so that the internal pressure in the compartment 200 is transmitted through to the diaphragm 76'.

The second patch 206 includes a relay module 4', antennae 3C and 3D identical respectively to the antennae 2C and 2D in the first patch 204, and internal connection wires 212 connecting the relay module 4' to the antennae 3C and 3D. The antennae 3C and 3D in the second patch 206 are also made of conductive rubber. The second patch 206 has an integrally-formed cable exit portion 214 through which an external connection wire 216 extends, connecting the relay module to a display module (not shown) in the cockpit.

The annular antennae 2D and 3D are used for the earth return. As these wholly surround their corresponding signal-path antennae 2C and 3C, stray capacitance loading is kept to a minimum even under wet conditions, which can occur both inside and outside the compartment 200.

Because each patch is fully moulded in rubber, it can be flexible enough to move with the membrane 202. Access to the interior of the compartment 200 can be gained through the valve attachment (not shown) which is usually large in order to spread loading across the membrane. Thus, the apparatus can be retro-fitted to any vessel.

Unlike a tyre, there is no substantial heating of the air within the compartment 200 in use, so that the

compartment will remain substantially at ambient temperature. Accordingly, temperature correction is probably not required.

Atmospheric pressure changes may, however, be more
5 significant as the internal pressure is only approximately 25% above atmospheric pressure. Atmospheric pressure changes can be compensated for at the display module by incorporating an additional sensor to measure atmospheric pressure. Pressure sensitivity to
10 a resolution of 0.05 bar can readily be accomplished over the range of pressures used.

<u>CLAIMS</u>:

1.   Signal transmission apparatus comprising:
transmitter circuitry including resonator means
having at least one component whose effective value
influences a natural resonant frequency of the resonator
means and can be changed in use of the circuitry;
excitation means for applying to the resonator means
an excitation signal having a predetermined excitation
frequency that is different from the said natural
resonant frequency; and
coupling means for providing a coupling between the
said resonator means and receiver circuitry of the
apparatus, the receiver circuitry being operable to
detect such a change in the said effective value via the
said coupling.

2.   Apparatus as claimed in claim 1, wherein the
said one component is a reactive component of the
resonator means.

3.   Apparatus as claimed in claim 1 or 2, wherein
the said excitation frequency is chosen such that at the
excitation frequency an impedance of the resonator means
compensates for a reactance of the said coupling and a
source impedance of the said excitation means.

4.   Apparatus as claimed in any preceding claim,
wherein the said excitation frequency is chosen such
that, in response to such a change in the said effective
value, a load current drawn by the said resonator means
changes proportionately more than a load voltage produced
across the resonator means.

5.   Apparatus as claimed in any preceding claim,
wherein the said excitation frequency is chosen such
that, in response to such a change in the said effective
value, there is no detectable change in a load voltage
produced across the resonator means.

6.   Apparatus as claimed in any preceding claim,
wherein the said excitation means are included in the

said receiver circuitry and the said excitation signal is
coupled to the said resonator means via the said
coupling.

7.   Apparatus as claimed in claim 6, wherein the
5   said transmitter circuitry includes power supply deriving
means connected to the said resonator means for deriving
a power supply needed for powering at least part of the
transmitter circuitry from the excitation signal
transmitted to the resonator means by the said receiver
10   circuitry.

8.   Apparatus as claimed in any preceding claim,
wherein, in use of the apparatus, the said resonator
means have a current-frequency characteristic that
includes a frequency band bounded by a first frequency at
15   which there is a current maximum in the said
characteristic and by a second frequency at which there
is a current minimum in the said characteristic, and the
said excitation frequency is chosen to be within the said
frequency band.

20   9.   Apparatus as claimed in any one of claims 1 to
7, wherein, in use of the apparatus, the said resonator
means have a current-frequency characteristic that
includes a frequency band bounded by a first frequency at
which there is a current maximum in the said
25   characteristic and by a second frequency at which there
is a current minimum in the said characteristic, and
outside the said frequency band there are respective
upper and lower reverse frequencies, at each of which the
effect on a load current drawn by the resonator means of
30   such a change in the said effective value is reversed,
the said upper reverse frequency being higher than the
greater of the first and second frequencies and the said
lower reverse frequency being lower than the lesser of
the first and second frequencies, and the said excitation
35   frequency being chosen to be in a frequency range from
the said lower reverse frequency to the said upper
reverse frequency.

10. Apparatus as claimed in any preceding claim, wherein the said coupling is a reactive coupling.

11. Apparatus as claimed in any preceding claim, wherein the said coupling includes a wireless coupling portion.

12. Apparatus as claimed in any preceding claim, wherein the said coupling includes a capacitive coupling portion.

13. Apparatus as claimed in claim 12, wherein the said excitation frequency is less than the said natural resonant frequency.

14. Apparatus as claimed in claim 13, wherein the said excitation frequency is greater than 0.8 times the said natural resonant frequency.

15. Apparatus as claimed in claim 12, wherein the said excitation frequency is in the range from 0.85 to 0.97 times the said natural resonant frequency.

16. Apparatus as claimed in any one of claims 12 to 15, wherein the said capacitive coupling portion comprises a first antenna coupled to the said resonator means, and a second antenna, opposed to the said first antenna and coupled to the said receiver circuitry.

17. Apparatus as claimed in claim 16, wherein each of the said antennae comprises a conducting surface, and the opposed antennae are separated by a gap.

18. Apparatus as claimed in claim 17, wherein one or each said conducting surface is covered by a layer of insulating material.

19. Apparatus as claimed in any one of claims 1 to 12, wherein the said coupling includes an inductive coupling portion.

20. Apparatus as claimed in any one of claims 1 to 10, wherein the said coupling is made up of a hard-wire coupling portion and an inductive coupling portion.

21. Apparatus as claimed in claim 19 or 20, wherein the said excitation frequency is higher than the said natural resonant frequency.

22. Apparatus as claimed in any preceding claim, wherein the said resonator means and the said receiver circuitry have a further coupling, in addition to the said coupling of claim 1, providing a return path
5   therebetween.

23. Apparatus as claimed in claim 22, when read as appended to claim 16, wherein the said further coupling also includes a capacitive coupling portion provided by a third antenna coupled to the said resonator means and a
10   fourth antenna, opposed to the said third antenna and coupled to the said receiver circuitry.

24. Apparatus as claimed in claim 22, wherein the said further coupling includes a mechanical coupling portion.

15   25. Apparatus as claimed in any one of claims 12 to 18, wherein the resonator means have respective first and second terminals connected to the said coupling means, and a capacitive element of the resonator means is connected between the said first terminal and a node of
20   the resonator means to which the remaining elements of the resonator means are connected, such that stray capacitance between the first and second terminals is connected in series with the said capacitive element between the said node and the said second terminal.

25   26. Apparatus as claimed in any preceding claim, wherein the said receiver circuitry is operable to detect a change in the current drawn by the resonator means brought about by the said change in the said effective value.

30   27. Apparatus as claimed in any preceding claim, wherein the said transmitter circuitry comprises sensor means for sensing one or more predetermined parameters, and the said change in the said effective value is brought about by a change in at least one of the said
35   predetermined parameters.

28. Apparatus as claimed in any preceding claim, wherein the said transmitter circuitry includes modulator

means connected with the said resonator means and operable to change the said effective value in dependence upon a control signal.

29. Apparatus as claimed in claim 28, wherein the said control signal is an oscillation signal of variable frequency, and the said receiver circuitry is operable to determine the control-signal frequency by detecting the frequency of change of the said effective value.

30. Apparatus as claimed in claim 28 or 29, wherein the said modulator means comprise a field-effect transistor having its gate connected operatively to the said resonator means and also having either its source or drain connected to receive the said control signal, the said field-effect transistor being maintained in a non-conducting state such that its gate capacitance is changed by changes in the control-signal potential.

31. Apparatus as claimed in any one of claims 28 to 30, wherein the said modulator means are operable to cause the said effective value to change in dependence upon each one in turn of a plurality of such control signals on a predetermined time-division-multiplexing basis.

32. Apparatus as claimed in claim 31, wherein the control signals of the said plurality are allocated respective time periods in a predetermined sequence and the said transmitter circuitry includes synchronising means operable to insert, between successive such predetermined sequences, a preselected synchronising signal for use in the receiver circuitry in demultiplexing the said control signals.

33. Apparatus as claimed in any one of claims 28 to 32, wherein the said transmitter circuitry further includes sub-carrier oscillation means for producing a sub-carrier oscillation signal, lower in frequency than the said excitation frequency, that is modulated in dependence upon the or each said control signal, the said effective value being changed in dependence upon the sub-

carrier oscillation signal.

34. Apparatus as claimed in claim 33, wherein the
said sub-carrier oscillation signal is frequency-
modulated in dependence upon the or each said control

5   signal.

35. Apparatus as claimed in any one of claims 28 to
34, wherein the said transmitter circuitry further
includes disabling means operable to inhibit production
of the said control signal when the voltage produced by

10   resonator means falls below a minimum operating value.

36. Apparatus as claimed in claim 35, wherein the
said disabling means are operable to determine the said
minimum operating value in dependence upon ambient
temperature.

15   37. Apparatus as claimed in claim 35 or 36, wherein
the said disabling means are operable to determine the
said minimum operating value in dependence upon a
measurement of the gate threshold voltage of a
representative transistor included in the said

20   transmitter circuitry.

38. Apparatus as claimed in any preceding claim,
wherein:
     the said receiver circuitry includes modulation
means for amplitude-modulating the said excitation signal

25   in dependence upon a further signal to be transmitted
from the receiver circuitry to the said transmitter
circuitry; and
     the said transmitter circuitry includes amplitude
detection means for detecting the said further signal

30   based on the amplitude of the excitation signal received
thereby.

39. Apparatus as claimed in claim 38, wherein the
said receiver circuitry further includes demodulation
means connected for demodulating a sensing signal,

35   derived from the resonator means in the transmitter
circuitry, with the said further signal so as to tend to
cancel out from the said sensing signal variations

arising from the amplitude modulation of the excitation
signal, the demodulated sensing signal being used to
detect the said change in the said effective value.

40.   Apparatus as claimed in any one of claims 1 to
5   37, wherein   the said receiver circuitry includes:
modulation means for amplitude-modulating the said
excitation signal in dependence upon a further signal to
be transmitted from the receiver circuitry to further
circuitry, separate from the said transmitter circuitry,
10   that is also coupled to the receiver circuitry; and
demodulation means connected for demodulating a
sensing signal, derived from the resonator means in the
transmitter circuitry, with the said further signal so as
to tend to cancel out from the said sensing signal
15   variations arising from the amplitude modulation of the
excitation signal, the demodulated sensing signal being
used to detect the said change in the said effective
value.

41.   Sensing apparatus, for transmitting sensor data
20   from a first element to a second element, the first and
second elements being movable relative to one another,
which apparatus includes signal transmission apparatus as
claimed in claim 27 or in any one of claims 28 to 40 when
read as appended to claim 27, the said transmitting
25   circuitry being adapted to be carried by the first
element and the said receiving circuitry being adapted to
be carried by the second element.

42.   Apparatus as claimed in claim 41, wherein the
said first element is rotatable relative to the second
30   element.

43.   Tyre pressure measuring apparatus, adapted to
be carried by a vehicle, including signal transmission
apparatus as claimed in claim 27 or any one of claims 28
to 40 when read as appended to claim 27, the said
35   transmitter circuitry being adapted to be carried by one
of the vehicle wheels and the said receiver circuitry
being adapted to be carried by a chassis of the vehicle,

and the said one or more predetermined parameters sensed
by the said sensor means including a tyre pressure of the
said one wheel.

44.   Apparatus as claimed in claim 43, wherein the
said sensor means include pressure sensing means for
measuring pressure and temperature sensing means,
independent of the pressure sensing means, for measuring
tyre temperature, and the said transmitter circuitry
further includes combining means connected with the
pressure sensing means and the temperature sensing means
for combining the measurement results of those sensing
means such that the said control signal varies according
to a predetermined function of the ratio between the
measured tyre pressure and the measured tyre temperature.

45.   Apparatus as claimed in claim 44, wherein:
the said pressure sensing means have a capacitance
C_p that varies with absolute tyre pressure P, at least in
a desired operating range of pressures of the pressure
sensing means, approximately in accordance with

$$C_p = k_p \cdot P^\phi$$

where k_p and ϕ are constants;
the temperature sensing means have a resistance R_t
that varies with absolute tyre temperature T, at least in
a desired operating range of temperatures of the
temperature sensing means, approximately in accordance
with

$$R_t = k_t \cdot T^{-\phi}$$

where k_t is a constant; and
the said combining means are operable to cause the
said control signal to vary in dependence upon the
product $R_t C_p$ of the said pressure-sensing-means
capacitance C_p and the temperature-sensing-means
resistance R_t.

46.   Apparatus as claimed in claim 44 or 45, wherein
the said pressure sensing means include a capacitive

pressure sensing element in parallel with a trimming capacitor.

47. Apparatus as claimed in any one of claims 44 to 46, wherein the said temperature sensing means include a thermistor in a resistor network.

48. Apparatus as claimed in claim 47, wherein the said thermistor has a negative temperature co-efficient.

49. Apparatus as claimed in any one of claims 44 to 48, wherein the said combining means include RC oscillator means including the said pressure sensing means in its capacitive element and including the said temperature sensing means in its resistive element.

50. Apparatus as claimed in any claim 49, wherein one side of the said capacitive element is connected to ground potential.

51. Apparatus as claimed in claim 49 or 50, wherein the said RC oscillator means comprise a logical RC oscillator having:

a first output node at which a non-inverted output signal is produced in use of the oscillator;

a second output node at which an inverted output signal is produced in use of the oscillator;

a timing node;

resistive means connected between the said timing node and the said second output node;

capacitive means connected between the said timing node and a node that is maintained at a fixed potential in use of the oscillator;

divider means having respective first and second portions connected in series between the said timing node and the said first output node; and

feedback means connected for deriving a feedback signal, for application to an input of the oscillator, from a common node at which the said first and second portions of the divider means are connected together.

52. Apparatus as claimed in any one of claims 43 to 51, including signal transmission apparatus as claimed in

any one of claims 16 to 18, wherein at least one of the
said first and second antennae is in the form of the
frustum of a cone.

53.   Apparatus as claimed in claim 52, wherein at
least one of the said first and second antennae subtends
an angle less than 360° on the said one wheel.

54.   Apparatus as claimed in any claim 52 or 53,
wherein the said first antenna is adapted to be located
under an inner rim of the said one wheel.

55.   Apparatus as claimed in any one of claims 43 to
54, wherein the said sensor means include a pressure
sensor having first and second mutually-opposed
electrodes having a dielectric therebetween, at least one
of the two electrodes being adapted to deflect towards
the other electrode when the sensor is subject to an
applied pressure such that the capacitance between the
electrodes changes with the applied pressure.

56.   Apparatus as claimed in claim 55, wherein at
least one of the two electrodes forms part of a casing of
the sensor.

57.   Apparatus as claimed in any one of claims 55 to
56, wherein the pressure sensor further comprises a
printed circuit board having electronic components
mounted on one side thereof and also having one of the
said electrodes printed on the other side thereof.

58.   Apparatus as claimed in any one of claims 55 to
57, wherein substantially all external surfaces of the
pressure sensor are made of conductive material.

59.   Apparatus as claimed in any one of claims 55 to
58, wherein the said pressure sensor and the said
transmitter circuitry are integrated together in a sensor
module adapted to be carried by the said one wheel.

60.   Apparatus as claimed in any one of claims 43 to
59, wherein the said receiver circuitry comprises first
and second modules connected together by a hard-wire link
through which a current flows between the two modules
when the apparatus is in use, the first module including

current modulating means for modulating the said current
in dependence upon the detected change in the said
effective value, and the said second module including
current detection means for detecting such modulation of
5   the said current by the said current modulation means in
the first module.

61.   Apparatus as claimed in claim 60, wherein one
of the first and second modules is a relay module mounted
on the vehicle chassis in the vicinity of the said one
10   wheel, and the other of the said first and second modules
is a display module mounted in the vicinity of the
vehicle dashboard.

62.   Apparatus as claimed in claim 60 or 61, wherein
the said current is modulated digitally between
15   respective low and high values in accordance with the
detected changes in the said effective value.

63.   Apparatus as claimed in claim 62, wherein at
least one of the said low and high values is dependent
upon a further signal that is independent of those
20   detected changes in the said effective value.

64.   Apparatus as claimed in claim 63, wherein the
said further signal is derived from temperature sensing
means arranged for sensing ambient temperature.

65.   Apparatus as claimed in any one of claims 43 to
25   64, wherein the said receiver circuitry includes gauge
pressure determining means operable to determine a gauge
tyre pressure P_g for the said one wheel based on

$$P_g = \frac{P}{T} \cdot T_a - P_a$$

where P and T are the absolute pressure and absolute
30   temperature sensed by the said sensor means and
transmitted by the transmitter circuitry to the receiver
circuitry, and P_a and T_a are the atmospheric pressure and
temperature respectively.

66.   The transmitter circuitry of apparatus as
35   claimed in any one of claims 1 to 65.

67. The receiver circuitry of apparatus as claimed in any one of claims 1 to 65.

68. A signal transmission method, for use with transmitter circuitry that includes resonator means having at least one component whose effective value influences a natural resonant frequency of the resonator means, and with receiver circuitry that has a coupling when in use to the said resonator means, the method comprising:

applying to the resonator means an excitation signal having a predetermined excitation frequency that is different from the said natural resonant frequency; bringing about a change in the said effective value of the said one component in the transmitter circuitry; and detecting such a change in the said effective value in the receiver circuitry via the said coupling.

69. Signal transmission apparatus substantially as hereinbefore described with reference to the accompanying drawings.

70. Transmitter circuitry substantially as hereinbefore described with reference to the accompanying drawings.

71. Receiver circuitry substantially as hereinbefore described with reference to the accompanying drawings.

72. A signal transmission method substantially as hereinbefore described with reference to the accompanying drawings.

73. Sensing apparatus substantially as hereinbefore described with reference to the accompanying drawings.

74. Tyre pressure measuring apparatus substantially as hereinbefore described with reference to the accompanying drawings.

Fig.1

Fig.2

Fig.3

Fig.4

Fig.5

Fig.6

Fig.7

Fig.8

5/14

Fig.9

TO DISPLAY MODULE
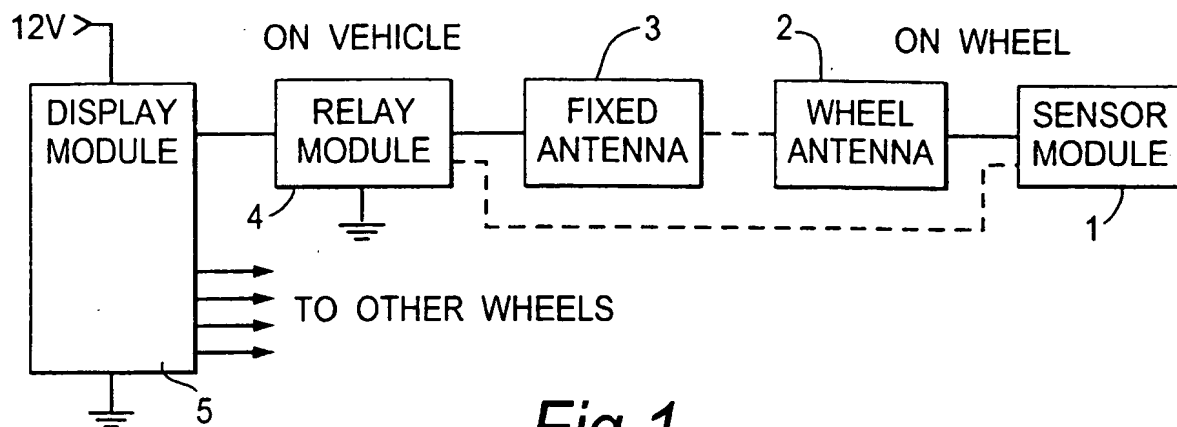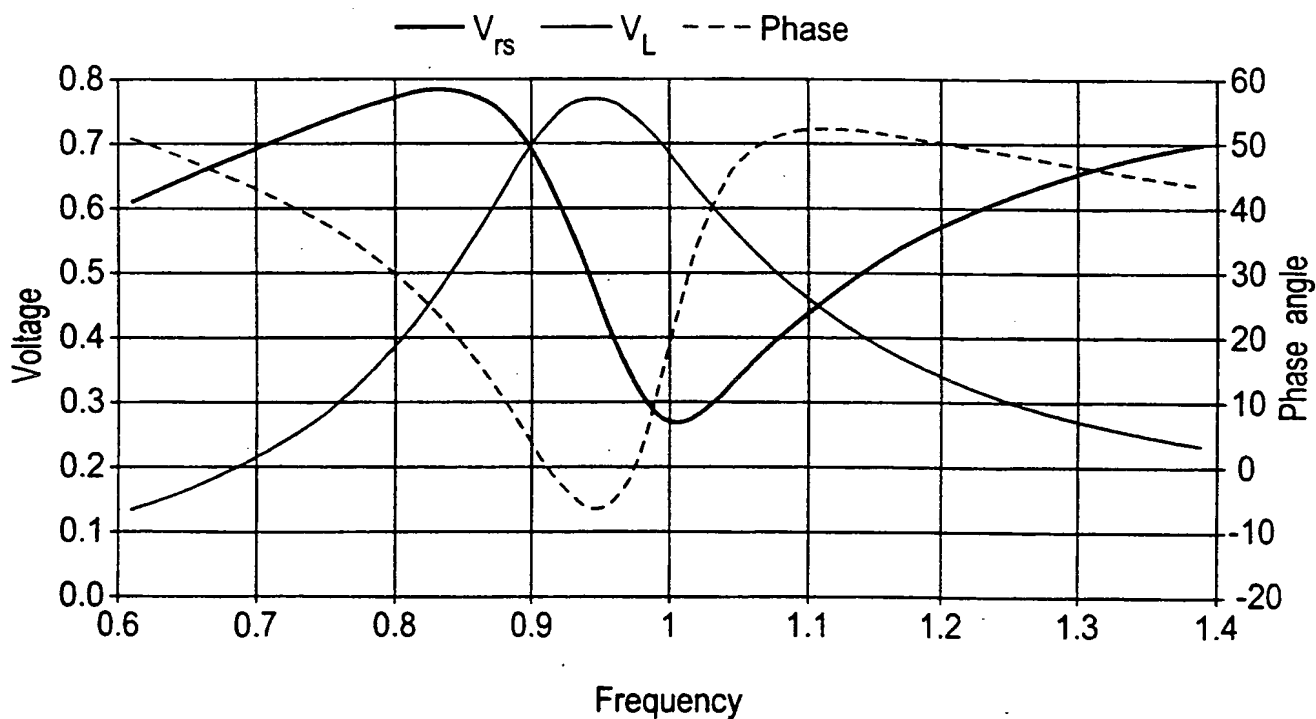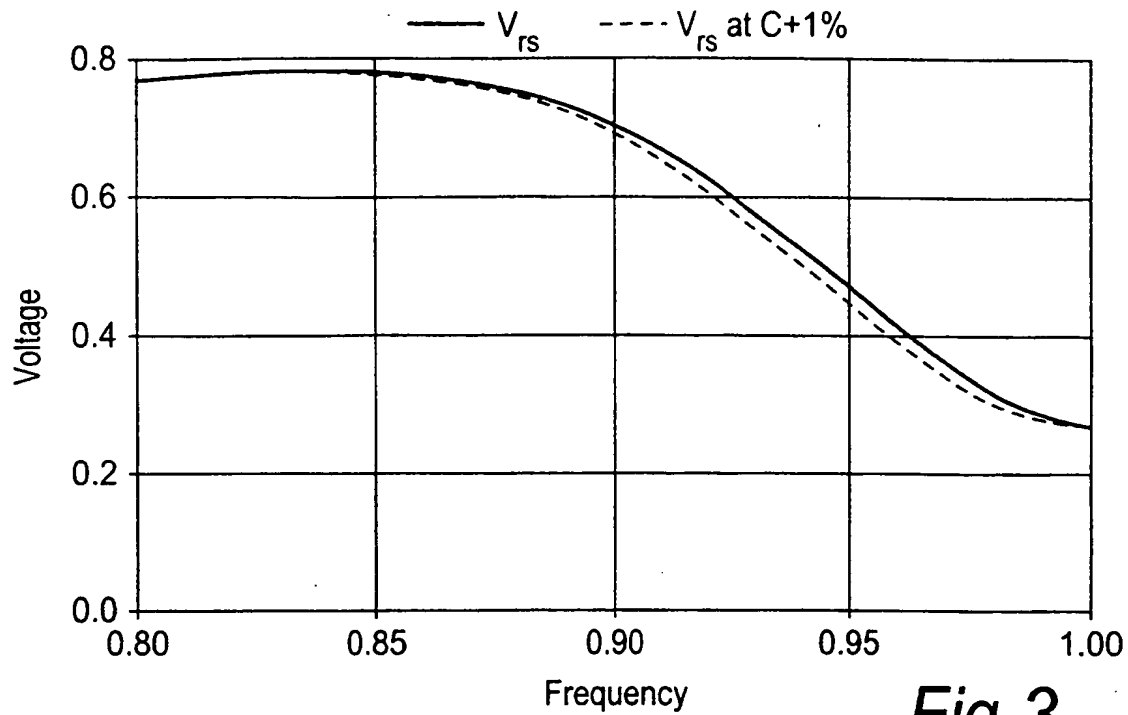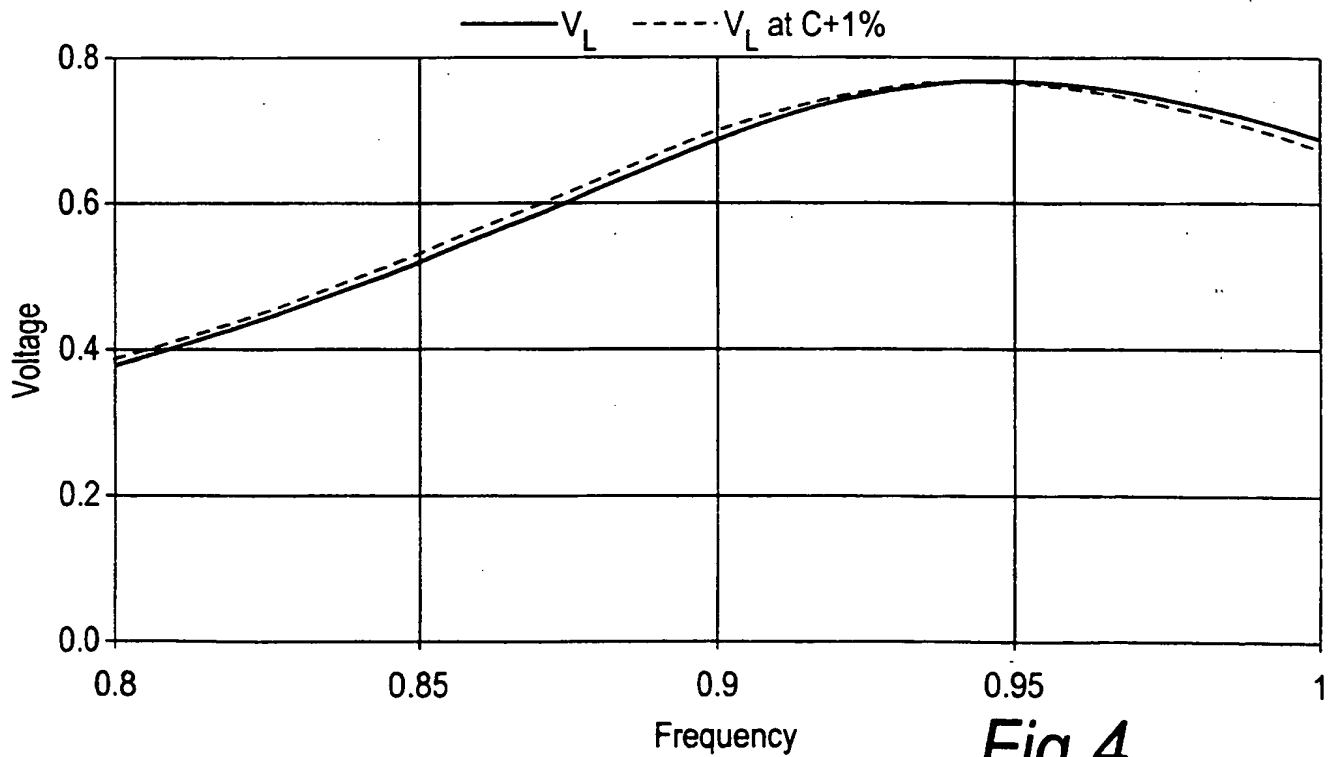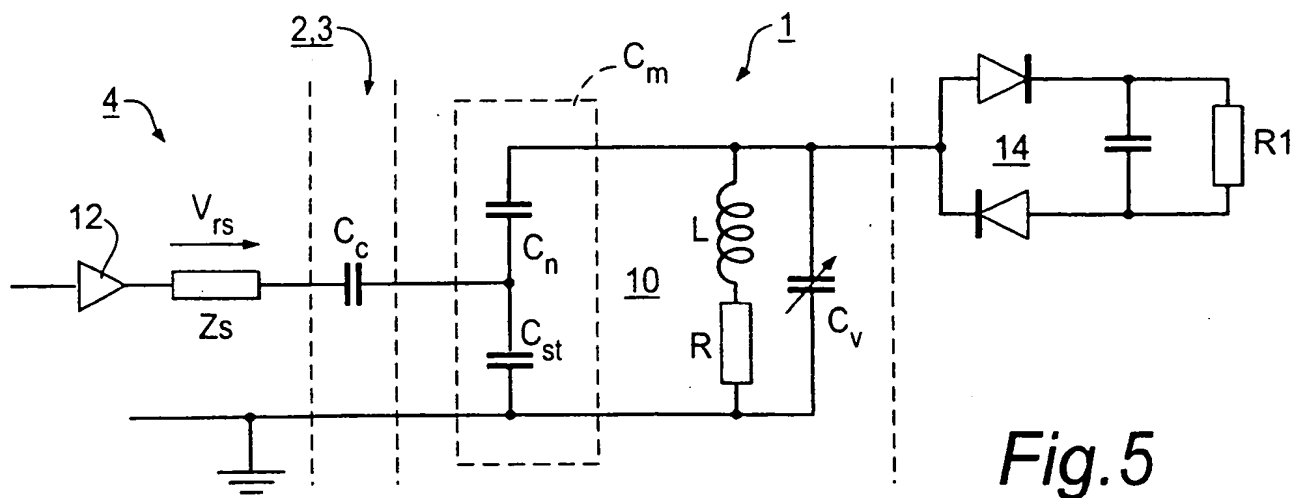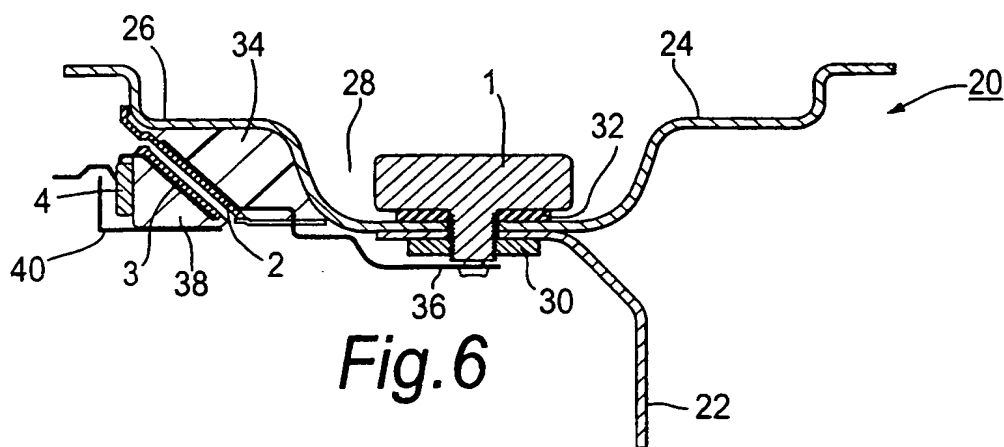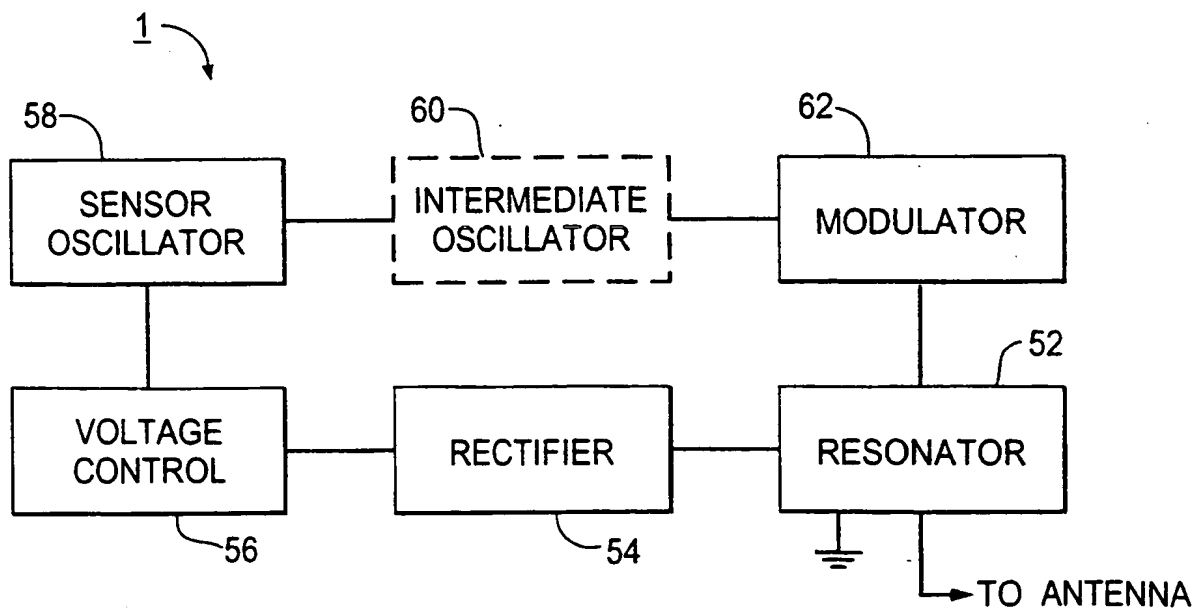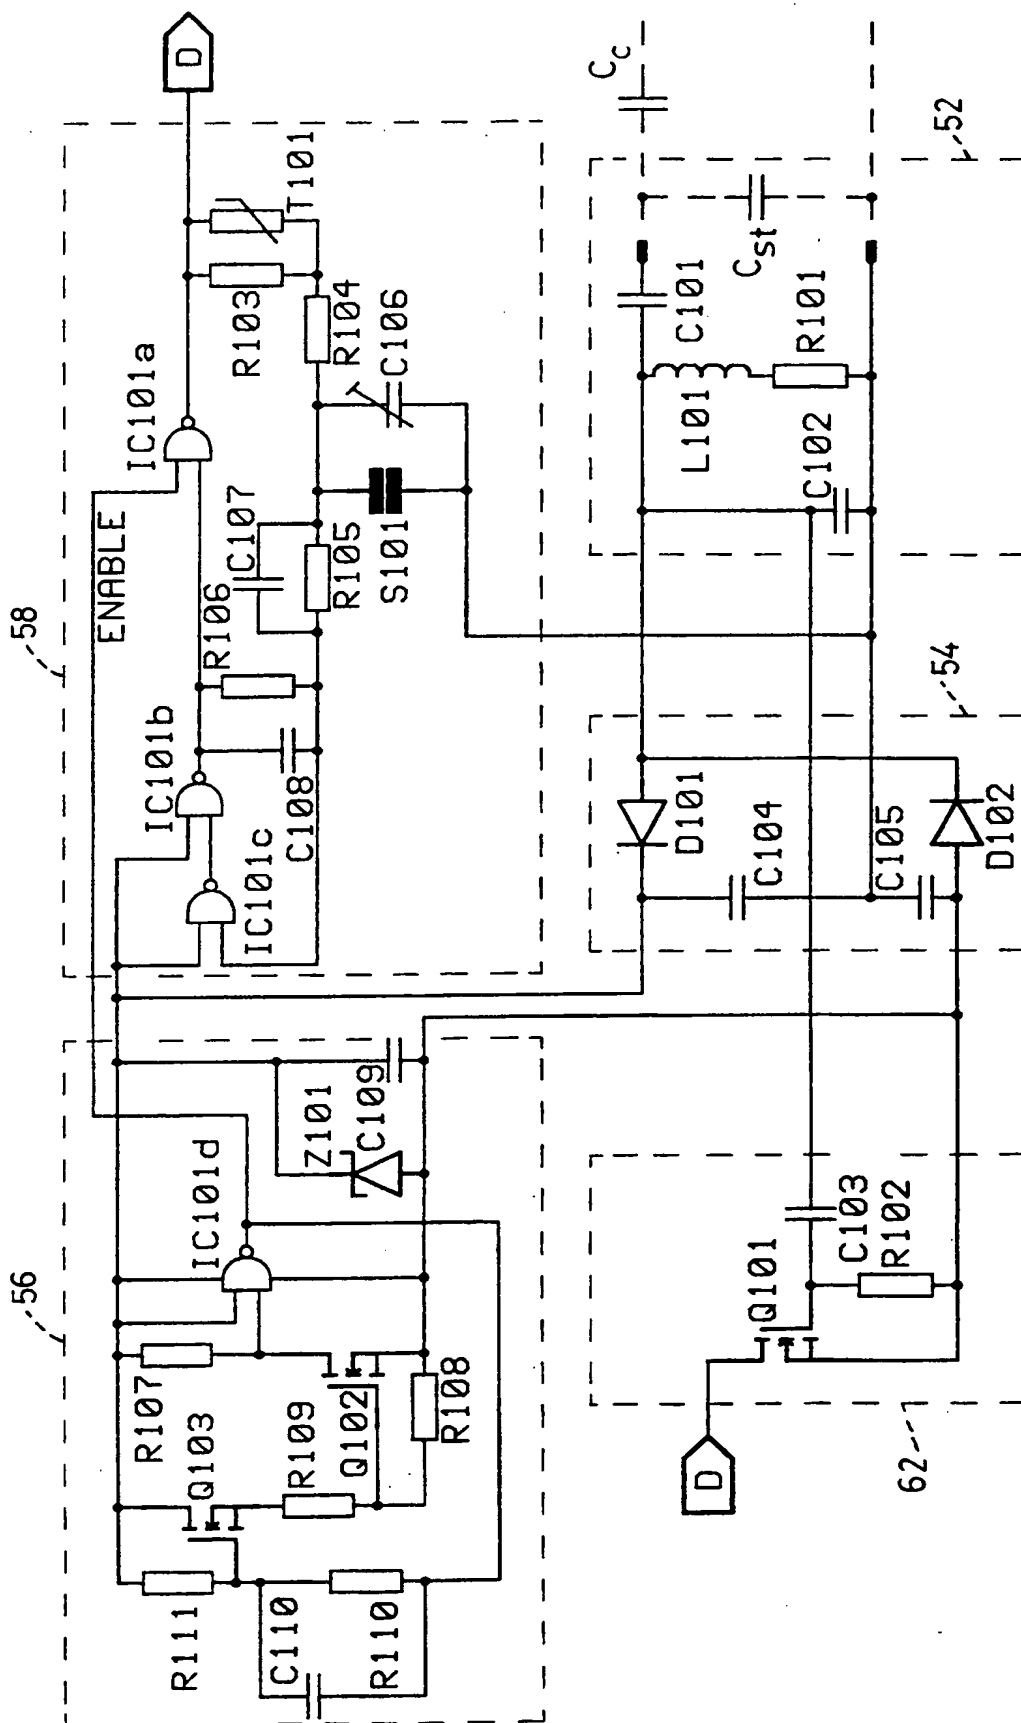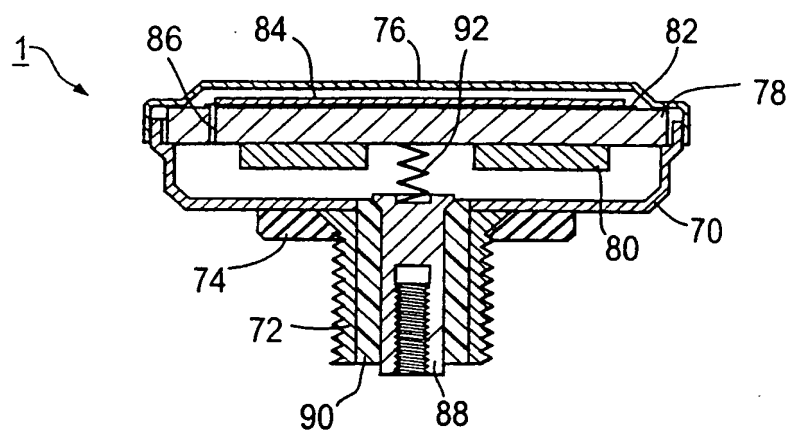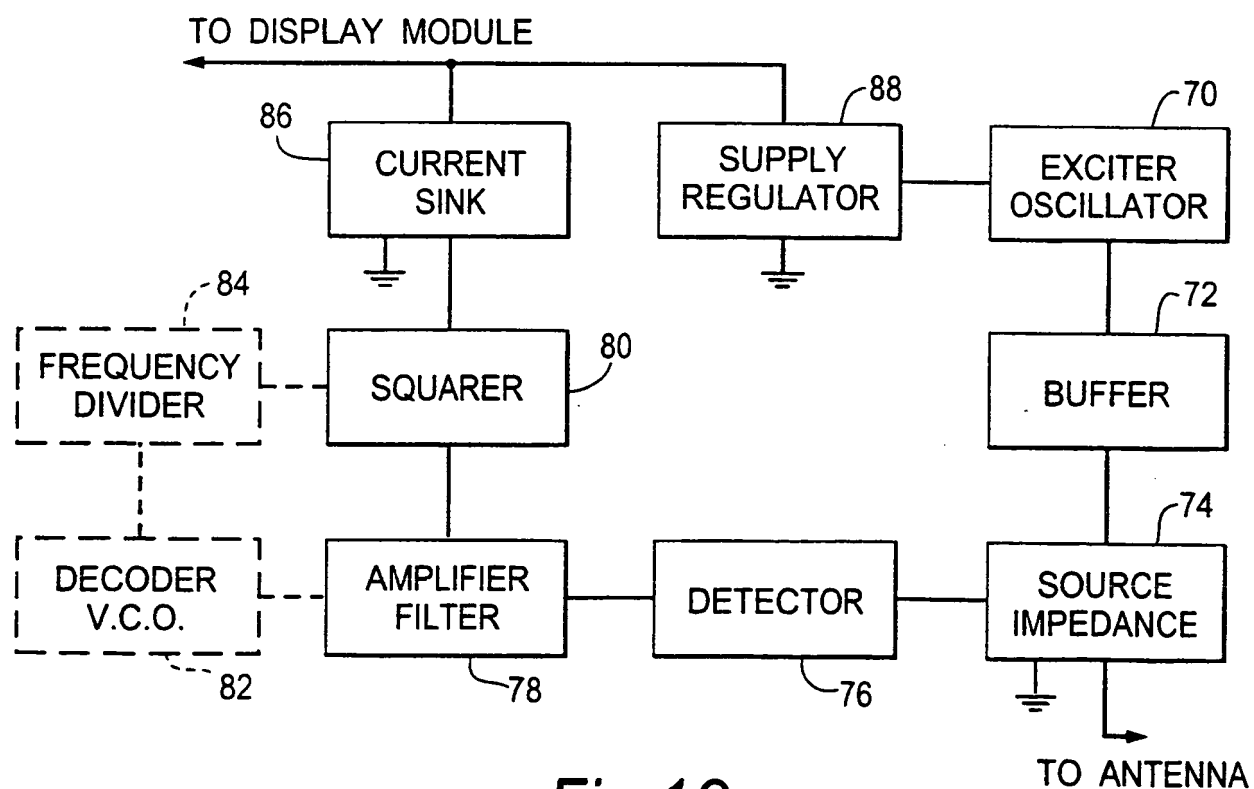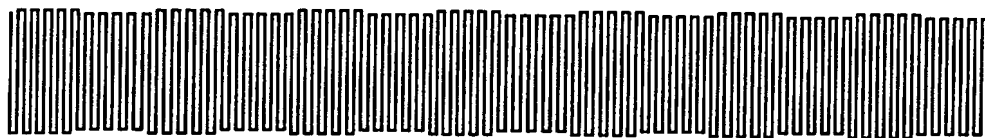

Fig.10
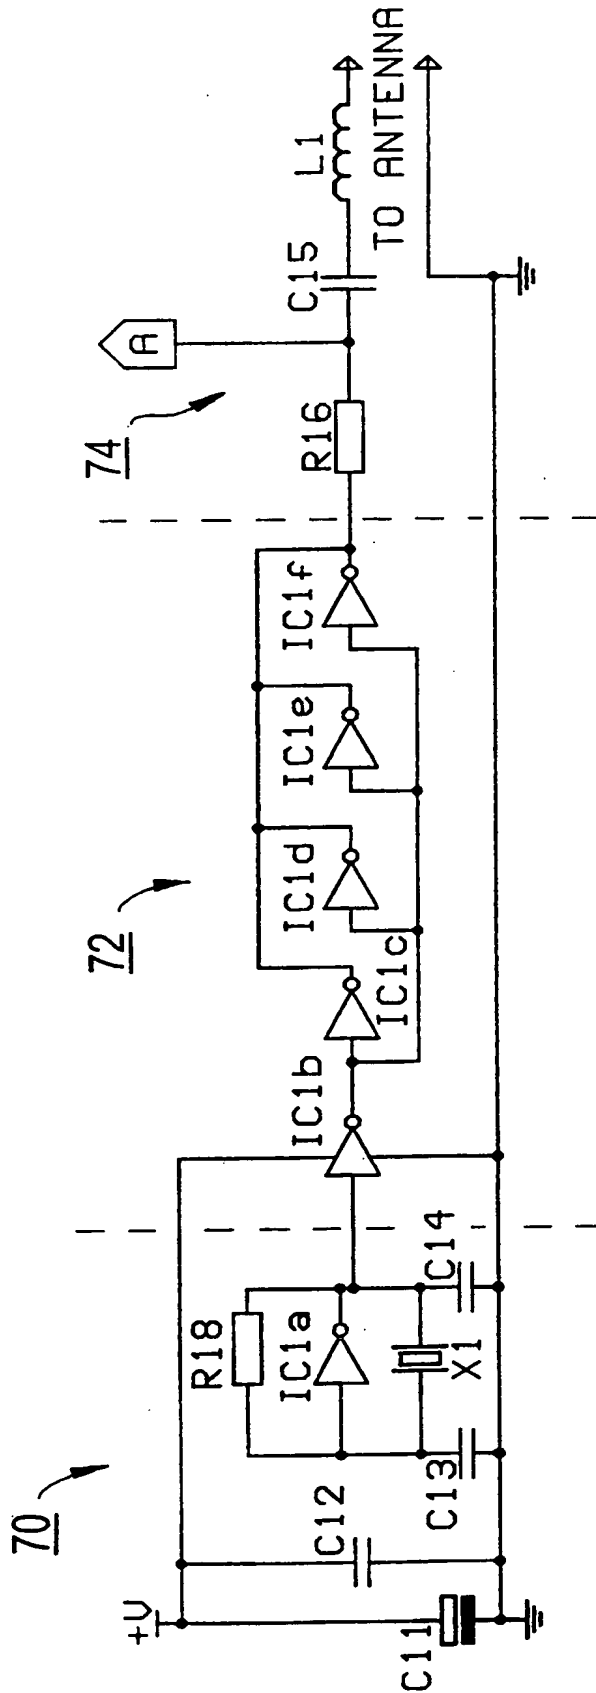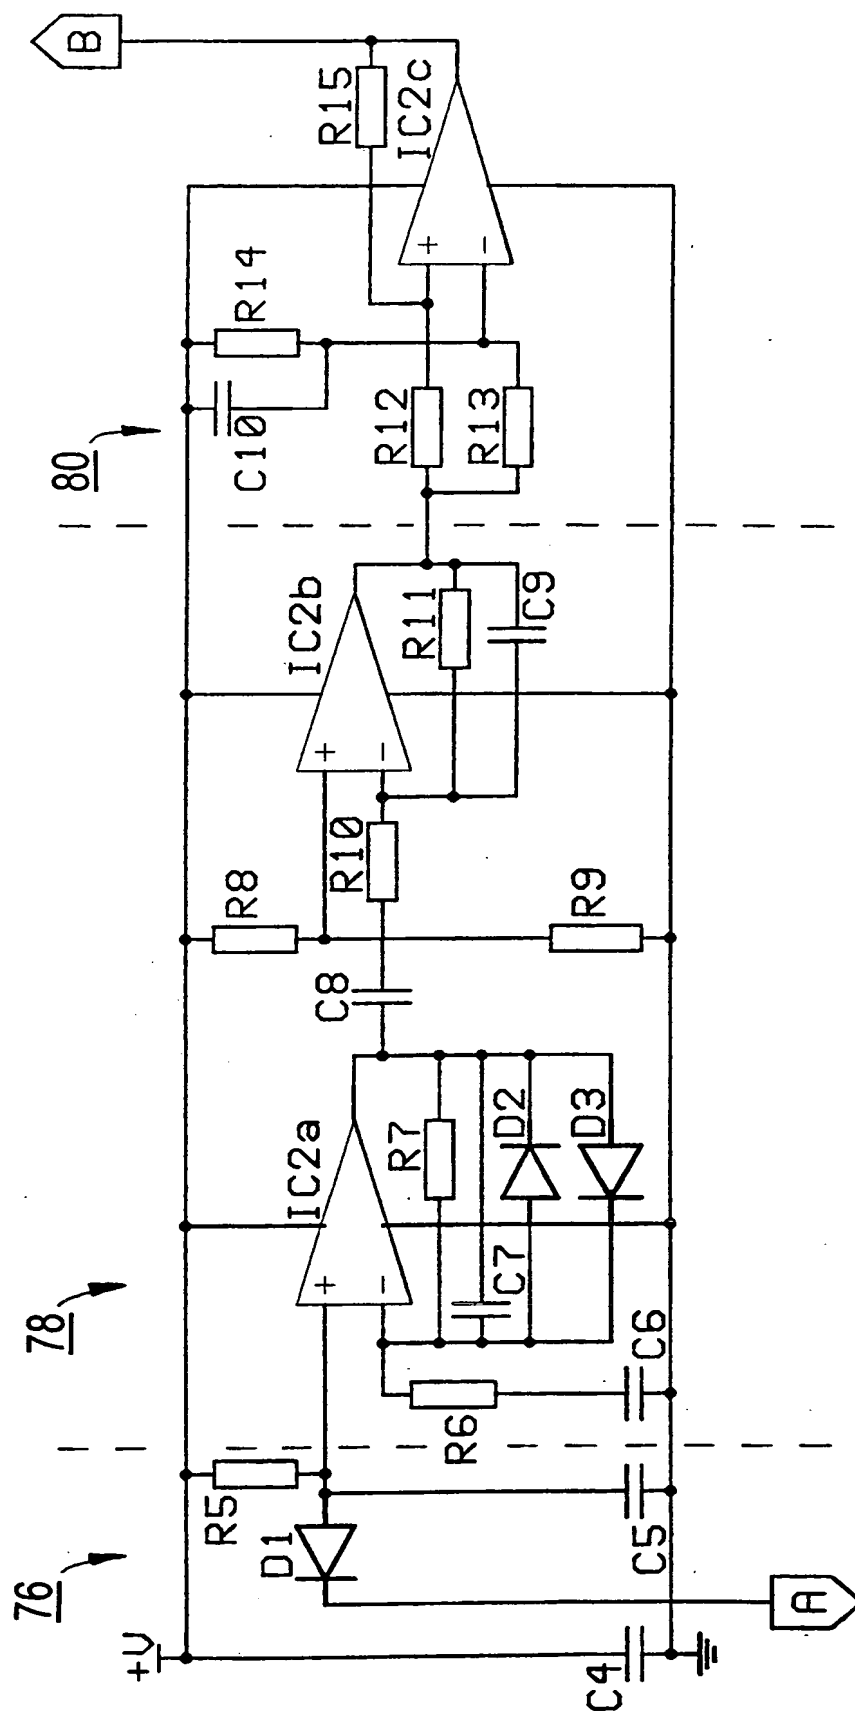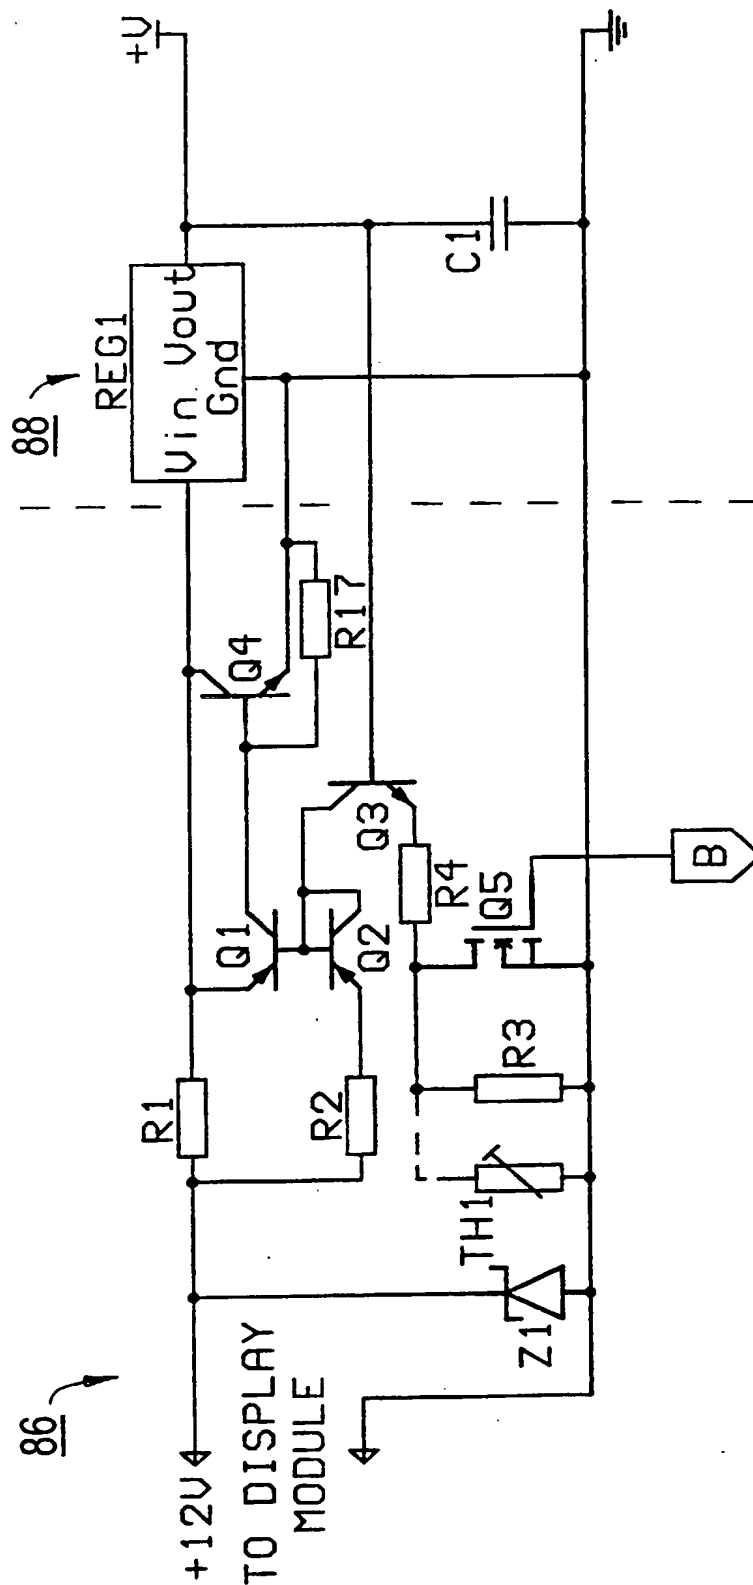
Fig.11(A)

Fig.11(B)

Fig.11(C)

EXCITER·
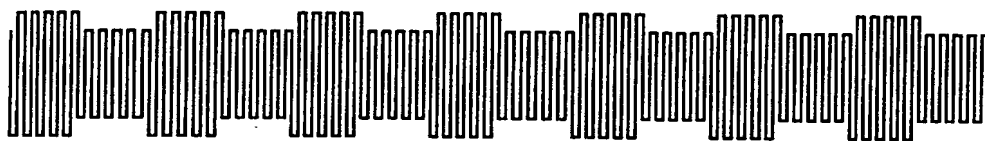VOLTAGE
5V P-P
Fig.12(A)
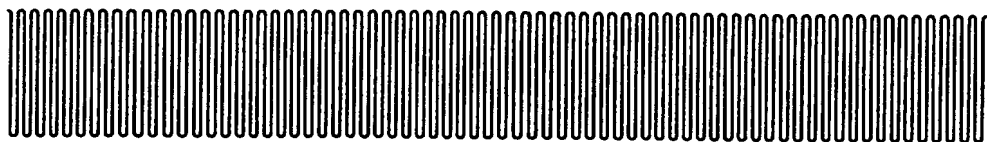
SENSOR
OSCILLATOR
OUTPUT
VOLTAGE 3V p-p
Fig.12(B)
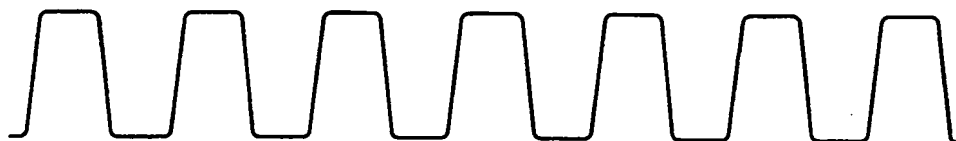
RESONATOR
VOLTAGE 3V p-p
Fig.12(C)

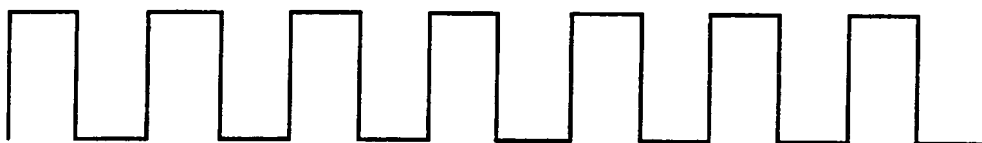SOURCE
IMPEDANCE
VOLTAGE 3V p-p
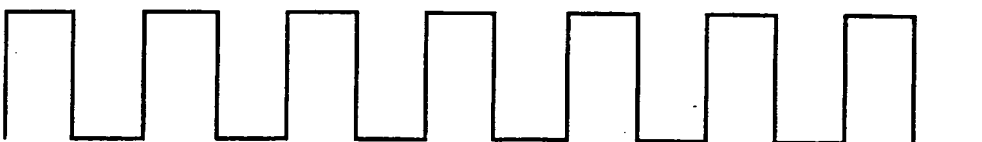*Fig.12(D)*

DETECTOR
VOLTAGE
Fig.12(E)

AMPLIFIER
OUTPUT
VOLTAGE
Fig.12(F)

SQUARER
OUTPUT
VOLTAGE 5V P-P
Fig.12(G)

RELAY   100mA
MODULE
CURRENT   40mA
Fig.12(H)
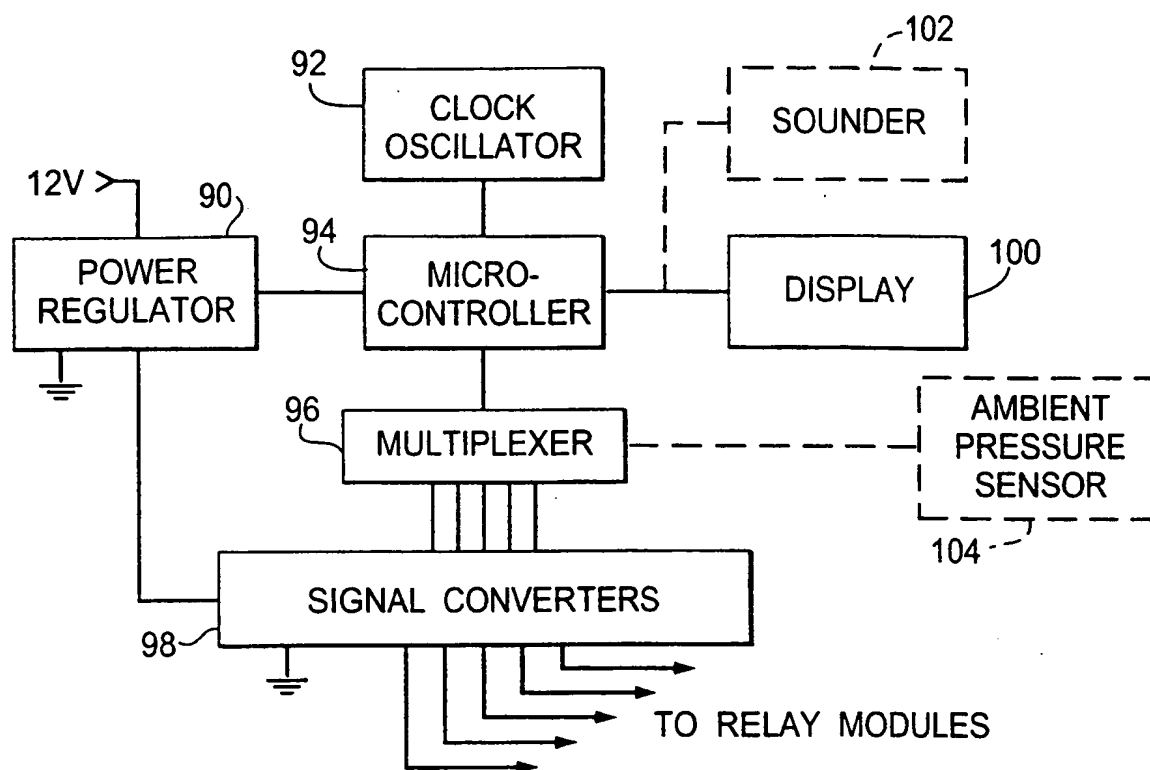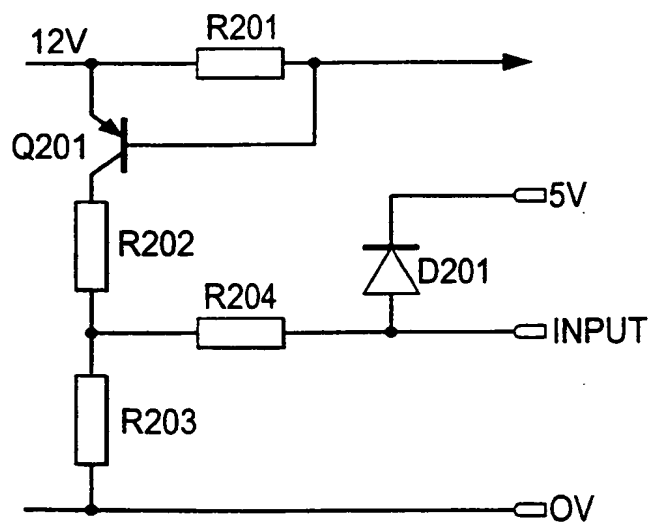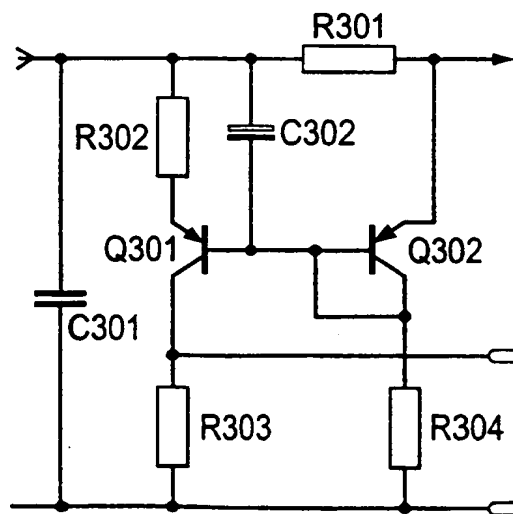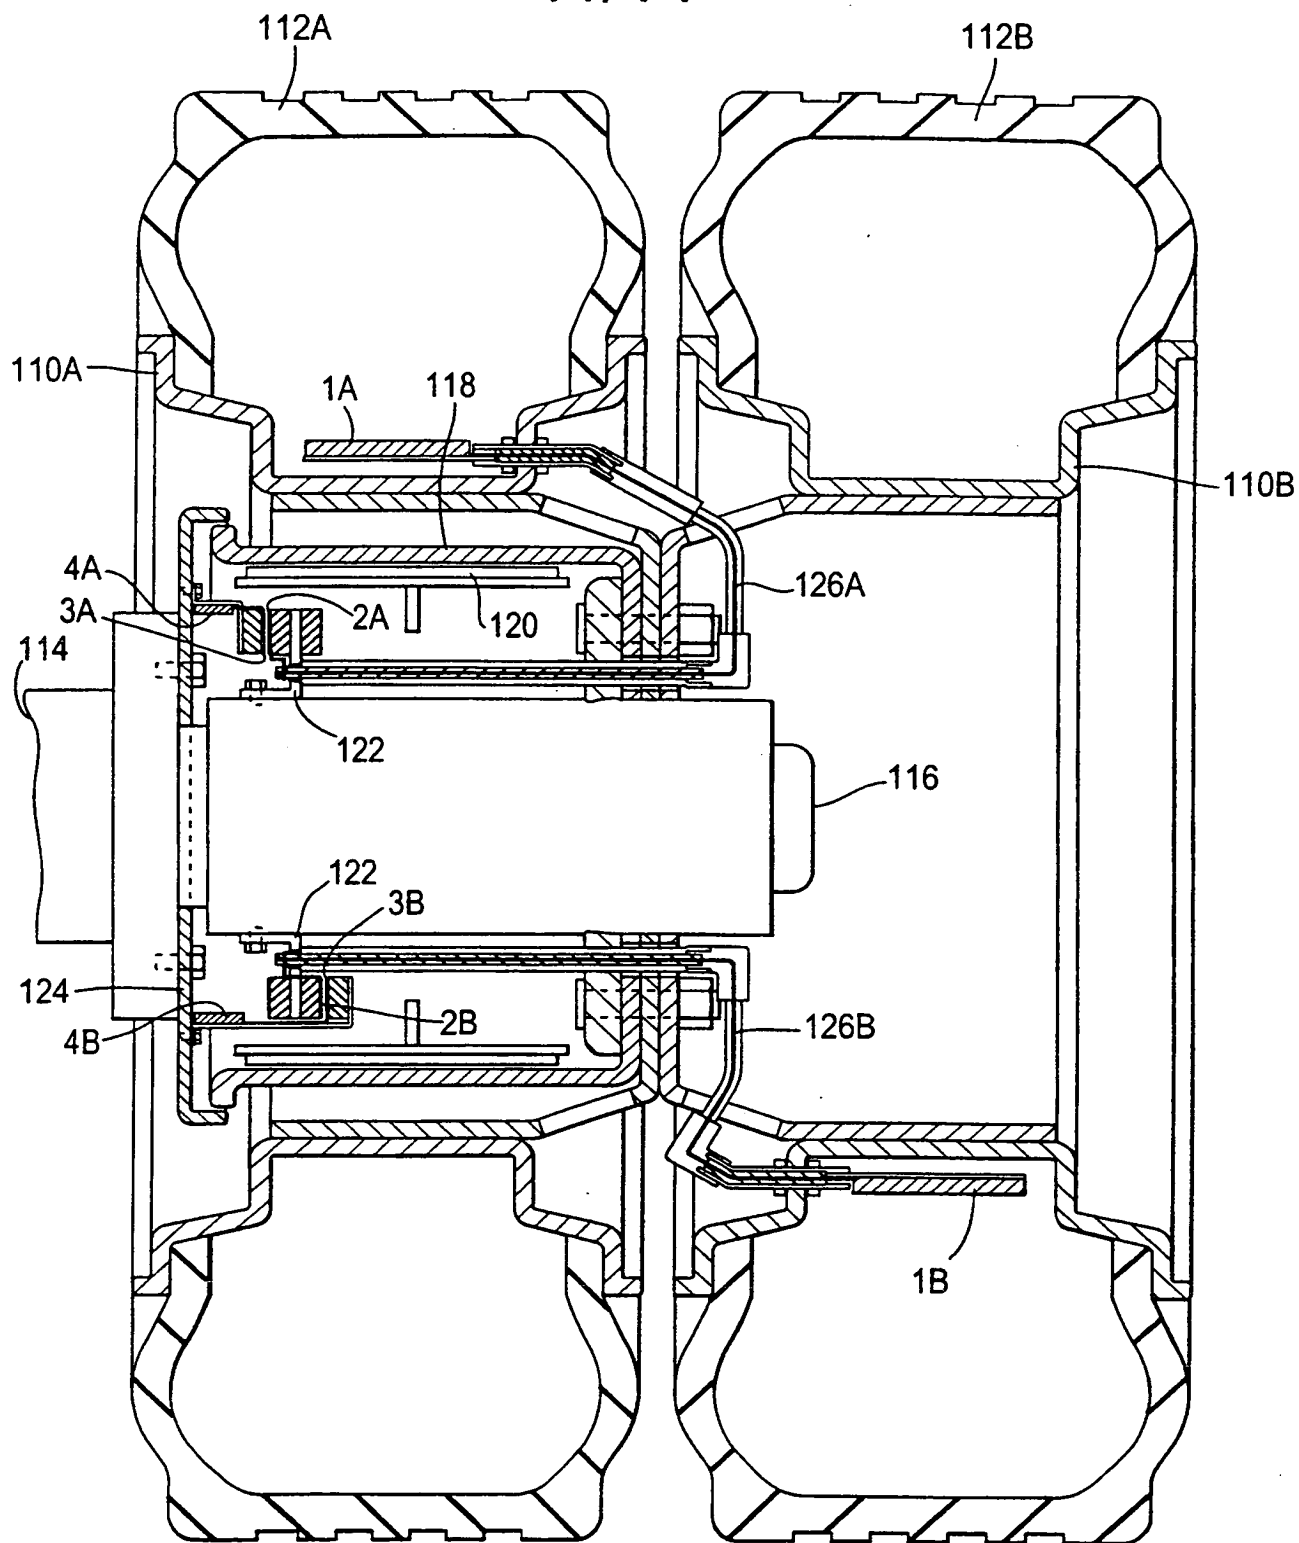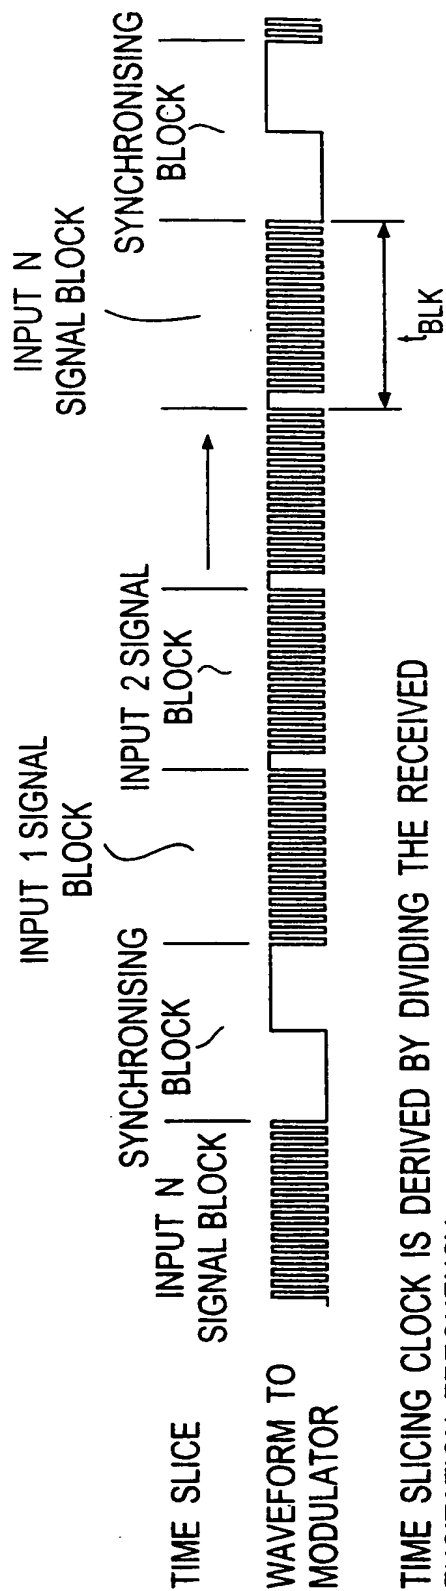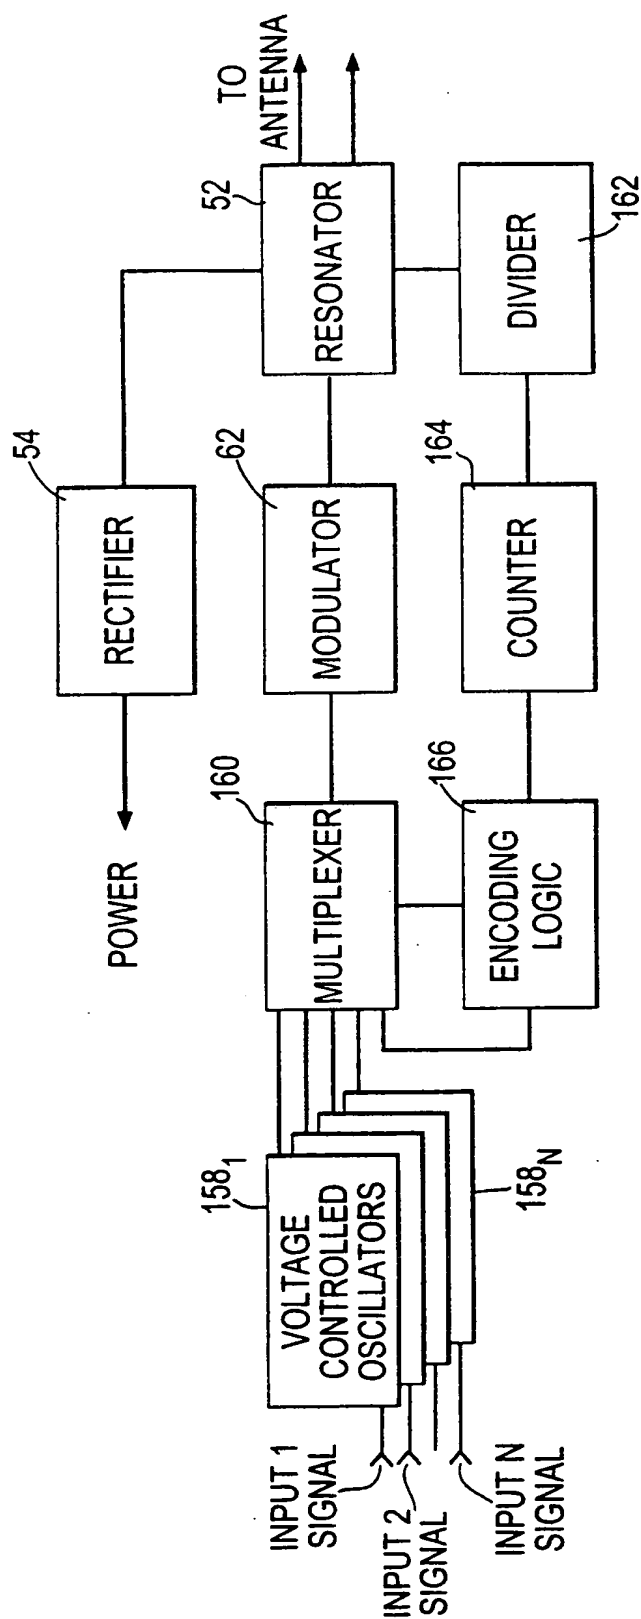
Fig.13

Fig.14

Fig.15

Fig.16

Fig.17

13/14

Fig.18

Fig.19
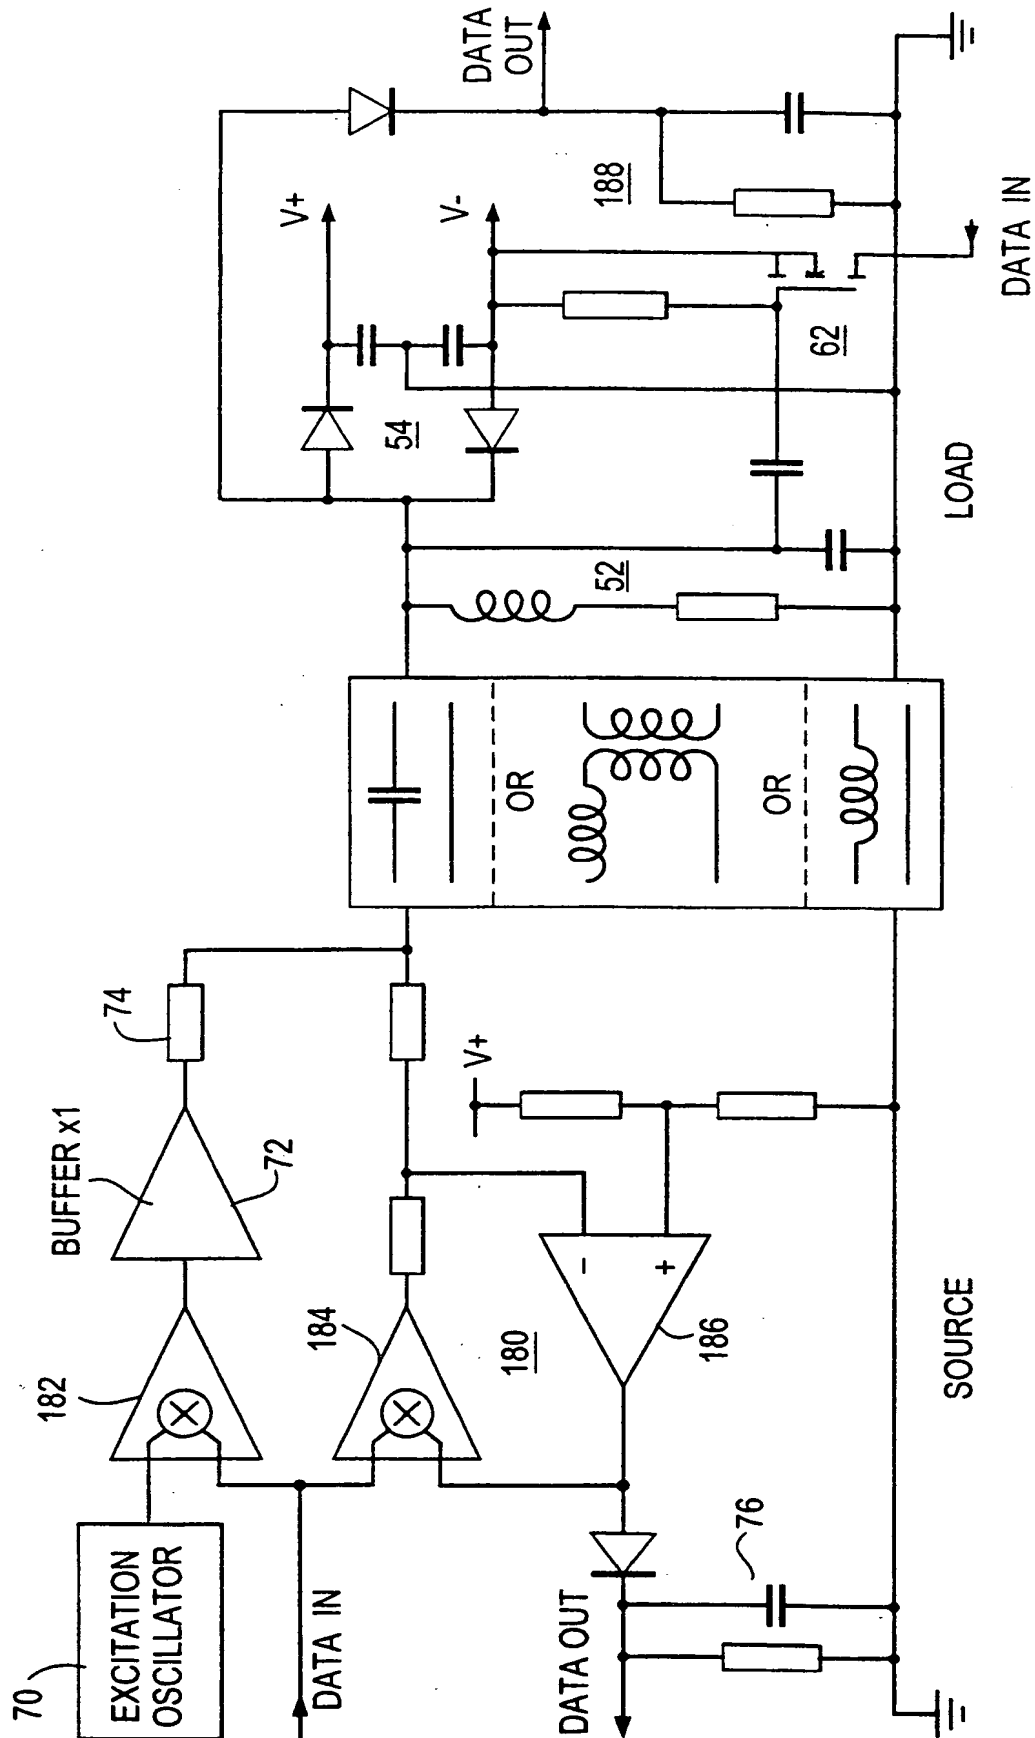
A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   B60C23/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7   B60C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 341 226 A (SCHRADER AUTOMOTIVE INC) 8 November 1989 (1989-11-08) column 5, line 36 -column 7, line 13 column 8, line 58 -column 9, line 11 ---	1-74
X	GB 2 252 479 A (WESTLAND AEROSTRUCTURES LTD) 5 August 1992 (1992-08-05) column 5, line 7 -column 6, line 11 column 7, line 20 -column 8, line 10 ---	1-74
X	ULKE W ET AL: "ELECTRONISCHES REIFENDRUCK-KONTROLL-SYSTEM. ELECTRONIC TIRE PRESSURE CONTROL SYSTEM" VDI BERICHTE,DE,DUESSELDORF, vol. 819, 5 September 1990 (1990-09-05), pages 207-216, XP000677037 ISSN: 0083-5560 the whole document ---	1-74

-/--

X	Further documents are listed in the continuation of box C.	X	Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
16 May 2000	30/05/2000

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Pham, P

1

INTERNATIONAL SEARCH REPORT

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 567 459 A (FOLGER JOSEF ET AL) 28 January 1986 (1986-01-28) column 2, line 66 -column 4, line 12 -----	41-43

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0341226	A	08-11-1989	US	4966034 A	30-10-1990
			AU	617963 B	05-12-1991
			AU	3323589 A	02-11-1989
			BR	8902036 A	05-12-1989
			CA	1319537 A	29-06-1993
			DE	68911024 D	13-01-1994
			DE	68911024 T	05-05-1994
			HK	9695 A	27-01-1995
			JP	1317815 A	22-12-1989
			MX	167194 B	09-03-1993
			ZA	8903175 A	26-06-1991
GB 2252479	A	05-08-1992	FR	2671650 A	17-07-1992
US 4567459	A	28-01-1986	DE	3029563 A	25-02-1982
			DE	3170398 D	13-06-1985
			EP	0045401 A	10-02-1982